
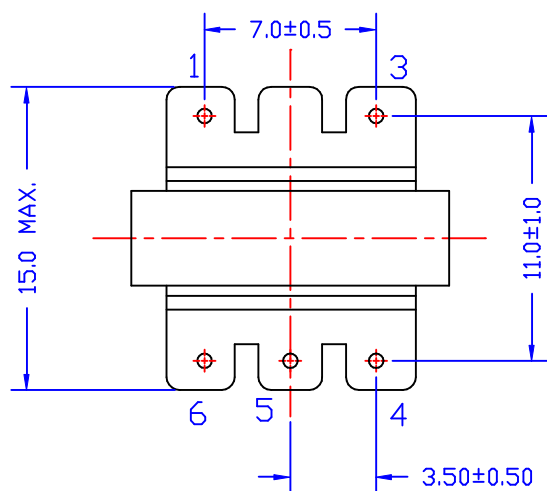
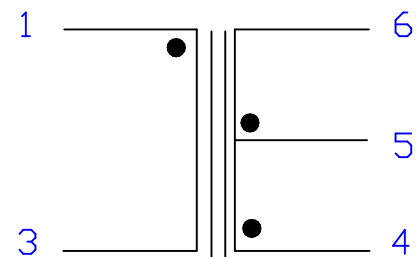


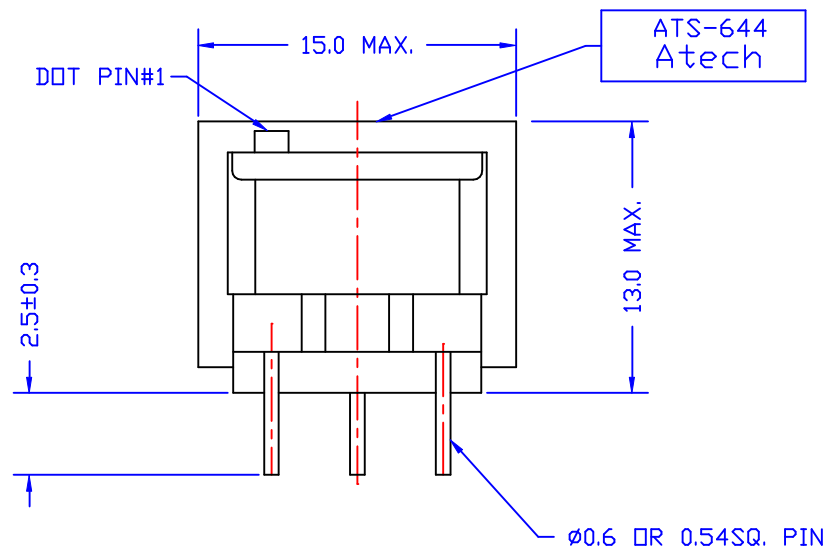

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 0.44 Ω M $\pm$ 12% . PIN 4-6 = 28.93 Ω M $\pm$ 12%.
2. INDUCTANCE PARALLEL (@300HZ, 1Vrms) : PIN 1-3 = 10.57mH MIN.
3. INSERTION LOSS (@1KHZ, 0dBm, 1-3 W/H 8 Ω M) :
PIN 4-6 = 1dB MAX.
4. RETURN LOSS (@REF. 600 Ω M) : @300HZ = 20dB MIN.
@1KHZ = 21dB MIN. @4KHZ = 19dB MIN.
5. TURNS RATIO (@8KHZ, 1Vrms) : PIN 4-6 : 1-3 = 8.6 $\pm$ 1%.
6. FREQ. RESP(@REF 1KHZ) : @300HZ = $\pm$ 0.5dB. @4KHZ = $\pm$ 0.5dB
7. HI-POT(@1000VAC, 1mA, 2SEC.) : PIN 1-4

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 CT : 8 TRANSFORMER		
							DWG. NO. ATS-644		
	RELEASE	03/06/2003	PAIR	SIMON	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						03/06/03			