
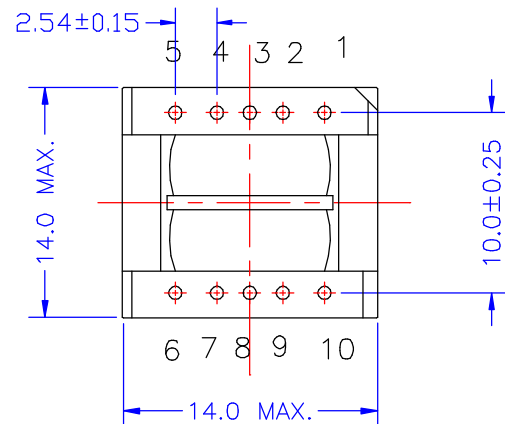
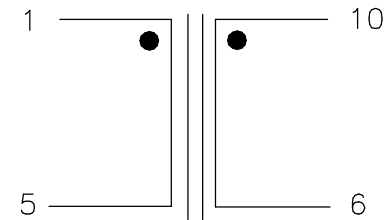


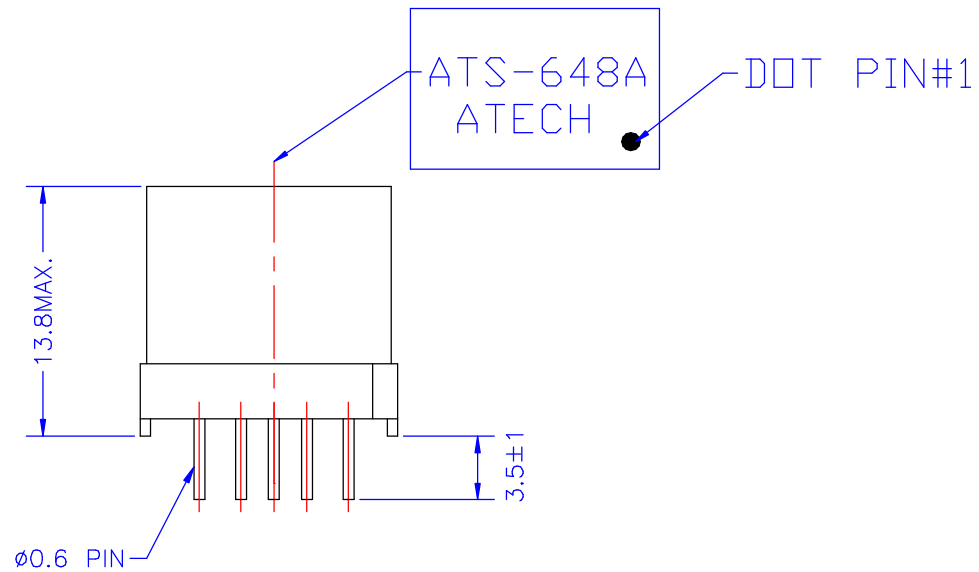

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = PIN 6-10 = 4 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : L1 = 1-5 = 4.5 mH±10%
L2 = 6-10 = 4.5 mH±10%
(L1-L2) / L1 X 100% = ±5%
3. TURN RATIO (@140KHZ, 0.1Vrms) PIN 1-5 : PIN 10-6 =1±1%
4. INSULATION RESISTANCE (@100VDC, 100M OHM, 2SEC) : P-S, P-C, S-C
5. HI-POT (@2KVAC, 1mA, 2SEC.) : P-S

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL CHOKE TRANSFORMER		
							DWG. NO. ATS-648A		
	RELEASE	07/09/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						07/09/03			<i>Pair</i>