
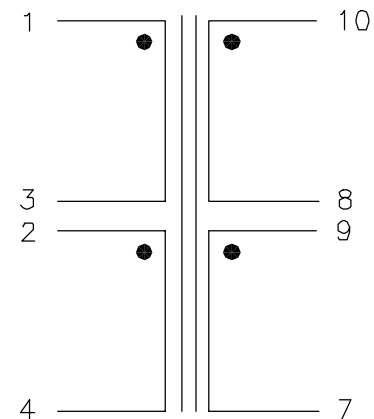
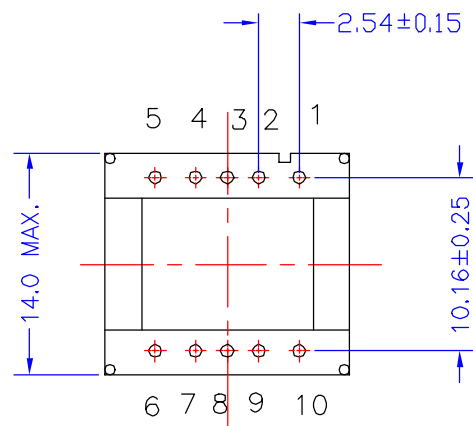


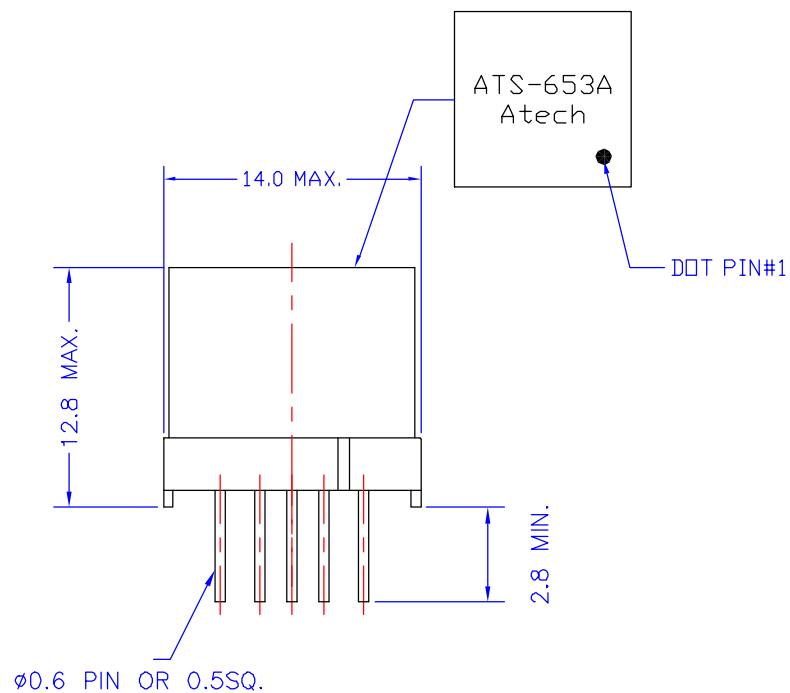

ELECTRICAL CHARACTERISTICS : (FOR T10120 COMPATIBLE)

- D.C.R. : PIN 1-3 = 2-4 = 0.8 Ω HM $\pm$ 12%
PIN 9-7 = 0.38 Ω HM $\pm$ 12%
PIN 10-8 = 0.27 Ω HM $\pm$ 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 1.5mH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 7-10, 8-9 SHORT) = 14uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 (2-3, 8-9 SHORT) = 30pF MAX.
- LONGITUDINAL BAL. : 30KHZ - 1.1MHZ = 60dB MIN.
250KHZ = 70dB MIN.
- THD (@100KHZ, 5.3Vrms) :
PIN 1-4 (2-3, 8-9 SHORT, 10-7 W/H 25 Ω HM) = -90dB MAX.
- TURN RATIO (@600KHZ, 1Vrms) :
PIN 1-4 : 10-7 (2-3, 8-9 SHORT) = 2 $\pm$ 1%
- HI-POT (@1875VAC, 1mA, 1SEC.) : 1-10 (2-3, 8-9 SHORT)
- RoHS COMPLIANCE.

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.	ATS-653AR
RELEASE	08/19/2005	BART	vincent	SUEDY	UNITS:	M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	08/19/05		SHEET 1 OF 1
REVISIONS								DRAW	
								Pair	