
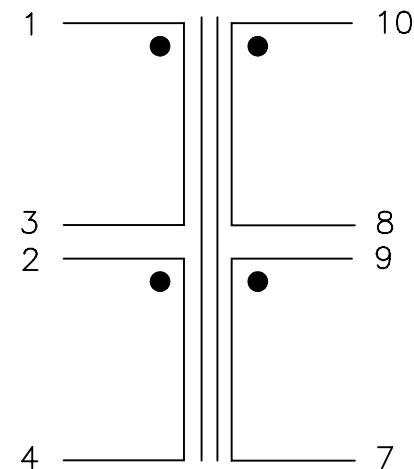
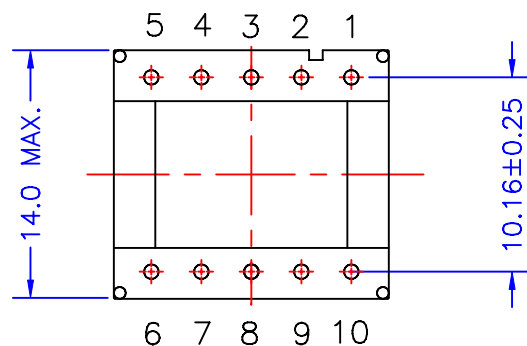


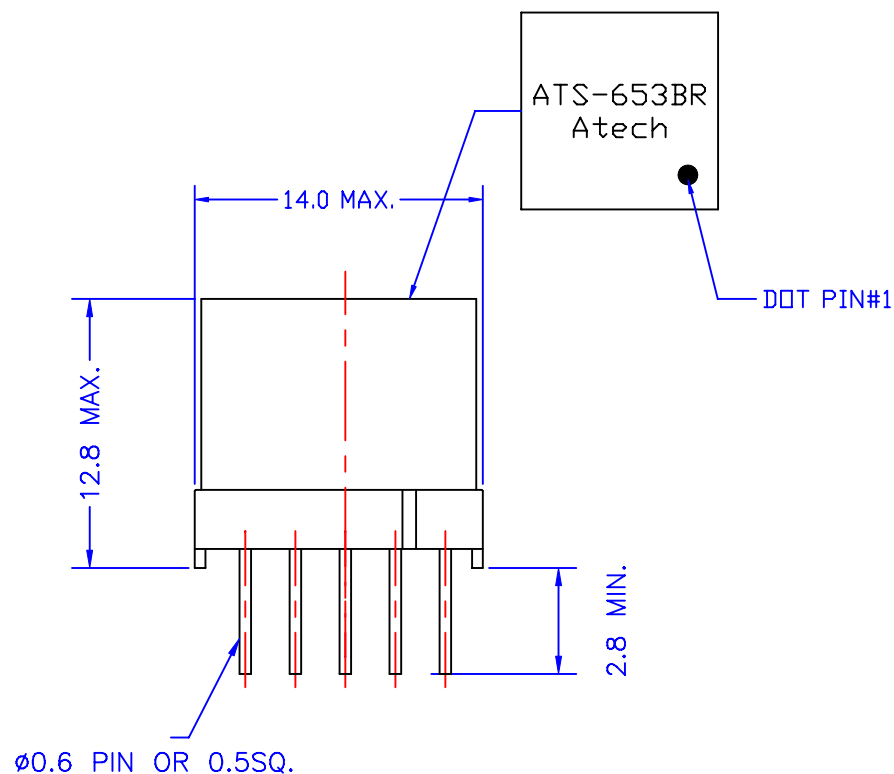

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 935 mΩ MAX.
PIN 9-7 = 232 mΩ MAX.
PIN 10-8 = 232 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 1.5 mH ±6%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 7-8-9-10 SHORT) = 14 uH MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-10 (2-3, 8-9 SHORT) = 30 pF MAX.
- TURN RATIO (@600KHz, 1Vrms) :
PIN 1-4 (2-3 SHORT) : PIN 10-7 (8-9 SHORT) = 2 ±1%.
- HI-POT (@1875VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-653BR
RELEASE		03/02/2007	PAIR	SAN	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						03/02/07	CTA41303LA	Pair