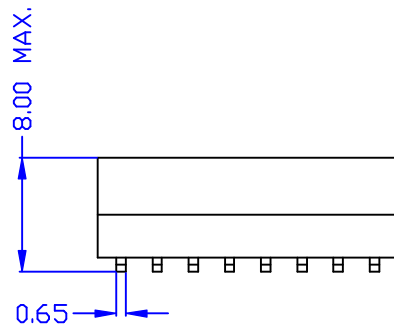
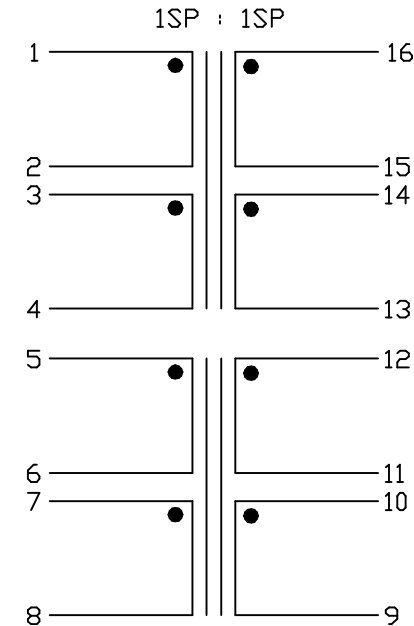
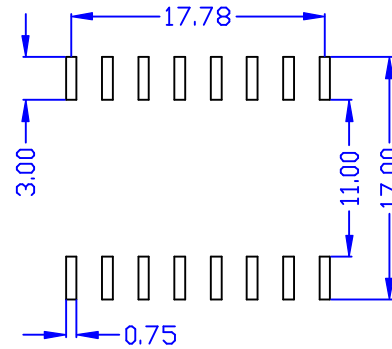
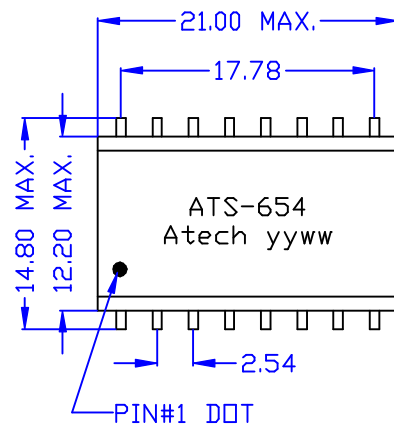


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1 - 4 : 16 - 13 (SHORT2,3,14,15) = 1 : 1 $\pm 1\%$
5 - 8 : 12 - 9 (SHORT6,7,11,10) = 1 : 1 $\pm 1\%$
2. OCL (10KHz/0.1Vrms) : 1 - 4 (SHORT2,3) = 30mH MIN.
5 - 8 (SHORT6,7) = 30mH MIN.
3. L.L (100KHz/0.1Vrms) : 1 - 4 (SHORT2,3,16,15,14,13) = 5uH MAX.
5 - 8 (SHORT6,7,12,11,10,9) = 5uH MAX.
4. CW/W (100KHz/0.1Vrms) : 1 - 16 (SHORT2,3,14,15) = 100pF MAX.
5 - 12 (SHORT6,7,10,11) = 100pF MAX.
5. VOLTAGE ISOLATION : 2000Vrms
6. DCR : 1 - 4 (SHORT2,3) = 2.9 OHM $\pm 15\%$
5 - 8 (SHORT6,7) = 2.9 OHM $\pm 15\%$
16 - 13 (SHORT14,15) = 2.8 OHM $\pm 15\%$
9 - 12 (SHORT10,11) = 2.8 OHM $\pm 15\%$

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

					Atech® Atech Technology Co., Ltd. TEL:(02)2794-8667 FAX:(02)2794-8004	TITLE ISDN TRANSFORMER DWG. NO. ATS-654	
RELEASE	05/20/2003	RDY	AL	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY
REVISIONS					DATE	05/20/03	SHEET 1 OF 1
							DRAW Pair