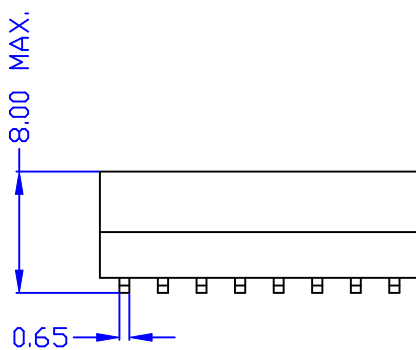
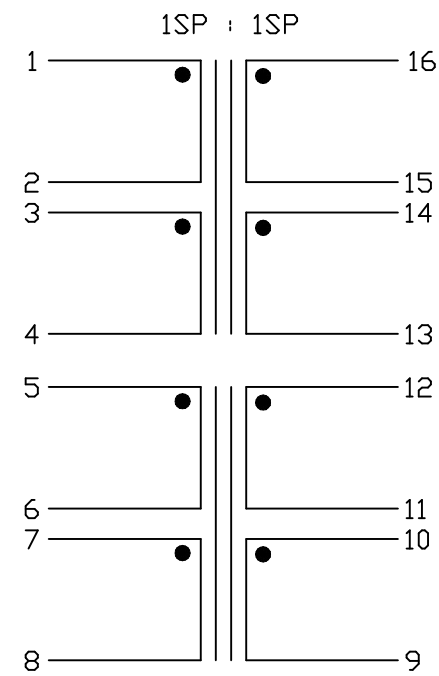
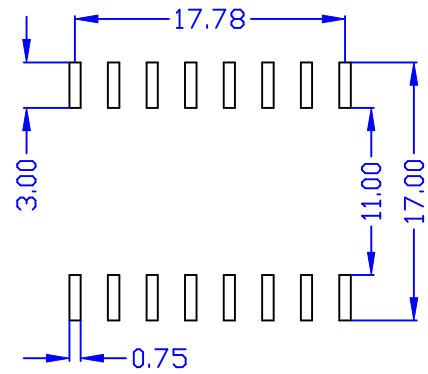
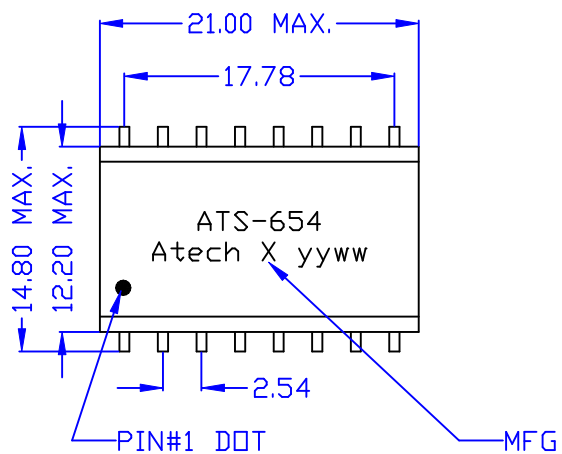


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1 - 4 : 16 - 13 (SHORT2,3,14,15) = 1 : 1 ±1%
5 - 8 : 12 - 9 (SHORT6,7,11,10) = 1 : 1 ±1%
2. DCL (10KHz/0.1Vrms) : 1 - 4 (SHORT2,3) = 30mH MIN.
5 - 8 (SHORT6,7) = 30mH MIN.
3. L.L (100KHz/0.1Vrms) : 1 - 4 (SHORT2,3,16,15,14,13) = 5uH MAX.
5 - 8 (SHORT6,7,12,11,10,9) = 5uH MAX.
4. CW/W (100KHz/0.1Vrms) : 1 - 16 (SHORT2,3,14,15) = 150pF MAX.
5 - 12 (SHORT6,7,10,11) = 150pF MAX.
5. VOLTAGE ISOLATION : 2000Vrms, 2S
6. DCR : 1 - 4 (SHORT2,3) = 2.9 OHM ±15%
5 - 8 (SHORT6,7) = 2.9 OHM ±15%
16 - 13 (SHORT14,15) = 2.8 OHM ±15%
9 - 12 (SHORT10,11) = 2.8 OHM±15%
7. RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE ISDN TRANSFORMER	
A	SPEC.	12/15/2005	BART	SEN	SUEDY			DWG. NO. ATS-654R	
	RELEASE	11/16/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						11/16/05			