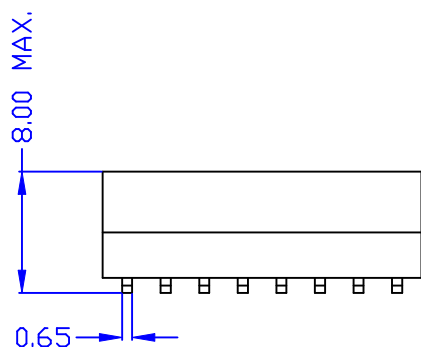
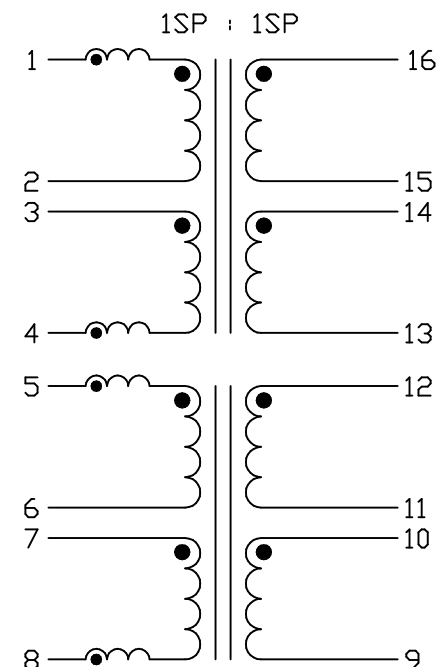
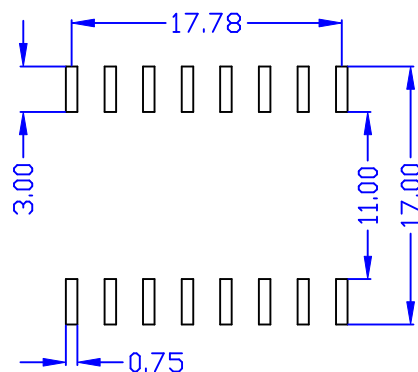
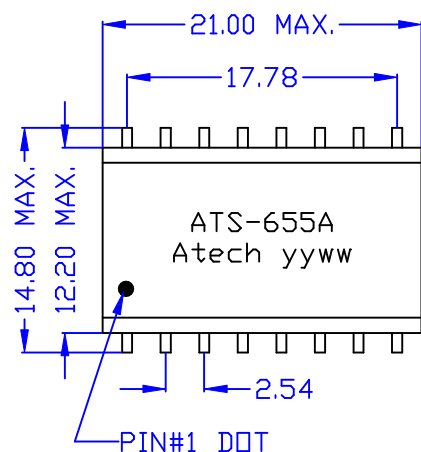


ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1 - 4 : 16 - 13 (SHORT2,3,14,15) = 1 : 1 $\pm 1\%$
5 - 8 : 12 - 9 (SHORT6,7,11,10) = 1 : 1 $\pm 1\%$
2. $\square$ CL (10KHz/0.1Vrms) : 1 - 4 (SHORT2,3) = 25mH MIN.
5 - 8 (SHORT6,7) = 25mH MIN.
3. L.L (100KHz/0.1Vrms) : 1 - 4 (SHORT2,3,16,15,14,13) = 5uH MAX.
5 - 8 (SHORT6,7,12,11,10,9) = 5uH MAX.
4. CW/W (100KHz/0.1Vrms) : 1 - 16 (SHORT2,3,14,15) = 100pF MAX.
5 - 12 (SHORT6,7,10,11) = 100pF MAX.
5. VOLTAGE ISOLATION : 1500Vrms 2S
6. COMMON MODE CHOKE : $\square$ CL = 50uH , DCR = 0.4 $\square$ HM MAX.
7. DCR : 1 - 4 (SHORT2,3) = 2.9 $\square$ HM $\pm 15\%$
5 - 8 (SHORT6,7) = 2.9 $\square$ HM $\pm 15\%$
16 - 13 (SHORT14,15) = 2.8 $\square$ HM $\pm 15\%$
9 - 12 (SHORT10,11) = 2.8 $\square$ HM $\pm 15\%$

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech®		TITLE ISDN TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-655A	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE		01/12/2006	Pair	AL	SUEDY	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						01/12/06		DRAW Pair	