
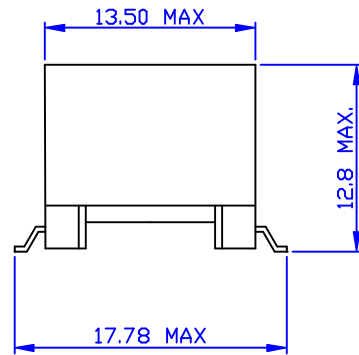


DOT PIN#1

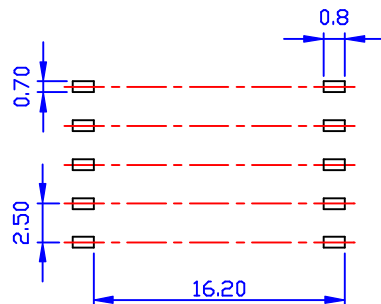

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : 1-2 = 3-4 = 0.96 Ω HM $\pm$ 12%
9-7 = 10-8 = 0.23 Ω HM $\pm$ 12%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 1-4 (2-3 SHORT) = 1.5mH $\pm$ 5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 1-4 (2-3, 10-8, 9-7 SHORT) = 15uH MAX.
4. INTERWINDING CAP : (@10KHZ, 0.1Vrms) 1-10 (2-3, 8-9, SHORT) = 40pF MAX.
5. LONGITUDINAL BAL. : (@20KHZ-1MHZ) = -55dB MAX.
6. THD : (30KHZ, 1.05Vrms, 2-3, 8-9 SHORT, 10-7 W/H 25 Ω HM) 1-4 = -83dB MAX.
7. TURN RATIO : (@600KHZ, 1Vrms) 1-4 : 10-7 (2-3, 8-9 SHORT) = 2 $\pm$ 2%
8. HI-POT : (@1875Vrms, 1mA, 1SEC) 1-10 (2-3, 8-9, SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-656	
	RELEASE	05/29/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						05/29/03			