

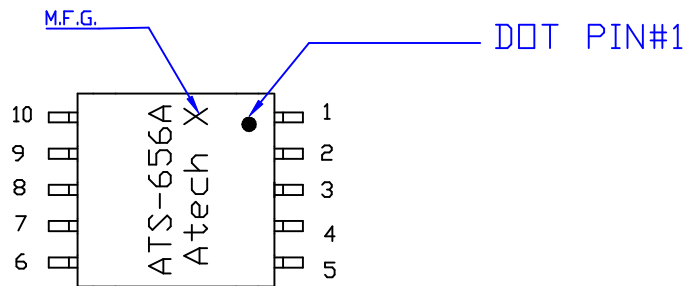


SUGGESTED PAD LAYOUT

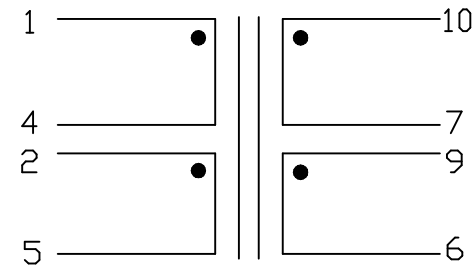

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 2-5 = 0.96 OHM±12%
PIN 6-9 = 7-10 = 0.23 OHM±12%
2. INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 1.5mH±5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4, 10-6, 9-7 SHORT) = 15uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-4, 7-9 SHORT) = 40pF MAX.
5. LONGITUDINAL BAL. (@20KHZ~1MHZ) : -55 dB MAX.
6. THD (@30KHZ, 1.05Vrms, 2-4, 7-9 SHORT, 10-6 W/H 25 OHM) :
PIN 1-5 = -83 dB MAX.
7. TURN RATIO (@1KHZ, 1Vrms) :
PIN 1-5/10-6 (2-4, 7-9 SHORT) = 2±2%
8. HI-POT (@1875VAC, 1mA, 2SEC) :
PIN 1-10 (2-4, 7-9 SHORT)

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02/2794-6667 FAX:02/2794-8004		DWG. NO.
								ATS-656A
						UNITS:	SAFETY	SHEET 1 OF 1
						M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						11/09/04		Pair