
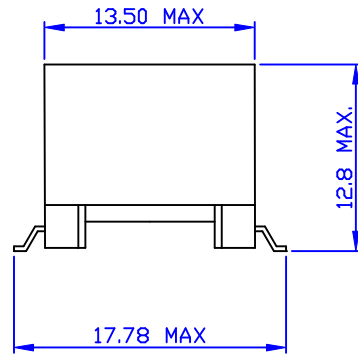


DOT PIN#1

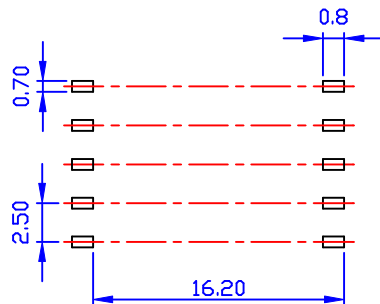

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : 1-2 = 3-4 = 0.25 Ω HM $\pm$ 12%
9-7 = 10-8 = 0.22 Ω HM $\pm$ 12%
2. INDUCTANCE : (<@10KHZ, 0.1Vrms) 1-4 (<2-3 SHORT) = 400 μ H $\pm$ 5%
3. LEAKAGE INDUCTANCE : (<@100KHZ, 0.1Vrms) 1-4 (<2-3, 10-8, 9-7 SHORT) = 4 μ H MAX.
4. INTERWINDING CAP. : (<@10KHZ, 0.1Vrms) 1-10 (<2-3, 8-9, SHORT) = 25pF MAX.
5. LONGITUDINAL BAL. : (<@20KHZ-1MHZ) = -55dB MAX.
6. THD : (<30KHZ, 1.05Vrms, 2-3, 8-9 SHORT, 10-7 W/H 25 Ω HM) 1-4 = -80dB MAX.
7. TURN RATIO : (<@100KHZ, 1Vrms) 1-4 : 10-7 (<2-3, 8-9 SHORT) = 2 $\pm$ 2%.
8. HI-POT : (<@1875Vrms, 1mA, 1SEC) 1-10 (<2-3, 8-9, SHORT)

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-657	
	RELEASE	05/30/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						05/30/03			