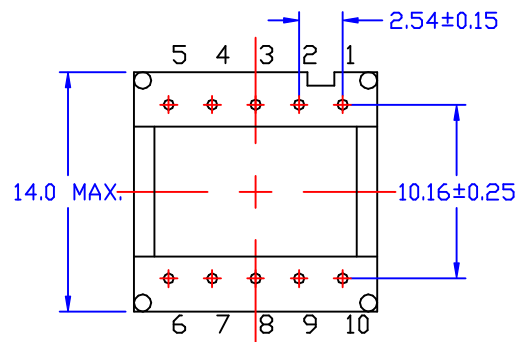
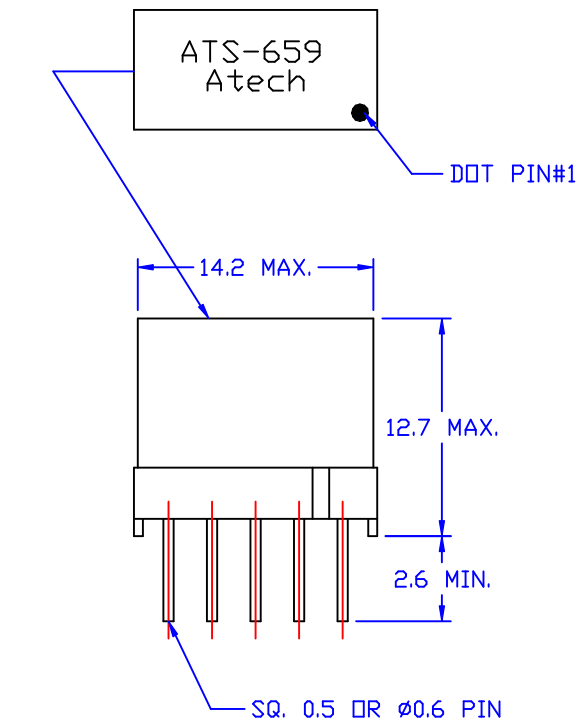


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-3 = 2-4 = 4.8 Ω HM $\pm$ 12%
PIN 7-8 = 10.2 Ω HM $\pm$ 12% , PIN 9-10 = 4.2 $\pm$ 12%
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-4 (2-3 SHORT) = 10mH $\pm$ 12%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3, 10-9 SHORT) = 85uH MAX.
- THD (@2KHz, 0dBm) :
PIN 1-4 (2-3 SHORT, 9-10 W/H 25 Ω HM) = -75dB TYP.
- TURN RATIO (@2KHz, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : 10-9 = 2 $\pm$ 1%
PIN 1-4 (2-3 SHORT) : 8-7 = 2 $\pm$ 1%
- HI-POT (@2KVAC, 1mA, 2SEC) PIN 1-10 (2-3 SHORT), PIN 1-8 (2-3 SHORT)

					Atech® Atech Technology Co., Ltd. TEL(02)2794-6667 FAX(02)2794-8004		TITLE TRANSFORMER	
							DWG. NO. ATS-659	
	RELEASE	06/05/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/05/03	SHEET 1 OF 1 DRAW <i>Pair</i>	