
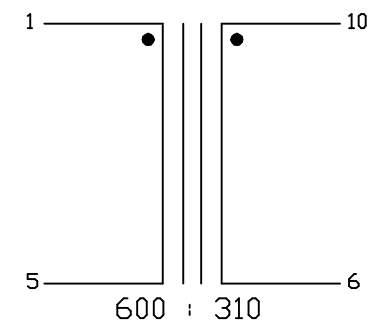
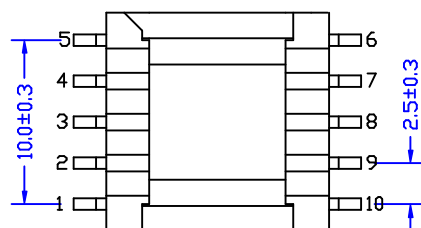

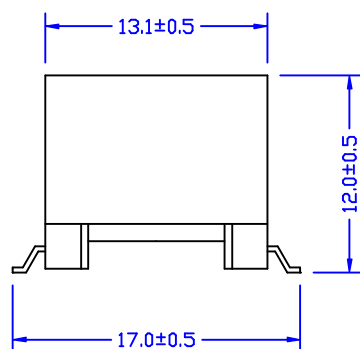




ELECTRICAL CHARACTERISTICS : <50819R COMPATIBLE>

1. DCR : PIN 1-5 = 130 OHM $\pm$ 15%
PIN 10-6 = 160 OHM $\pm$ 15%
2. INDUCTANCE (@300HZ, 1Vrms) : PIN 1-5 = 7.3H TYP.
3. Z (@1KHZ, 1Vrms) : PIN 1-5 (10-6 W/H, 310 OHM) = 600 $\pm$ 10%
4. RETURN LOSS (@300HZ, 1Vrms) : PIN1-5 (10-6 W/H, 310 OHM) = 20dB MIN.
5. THD (@600HZ, -10dBm) : PIN 1-5 (10-6 W/H, 310 OHM) = 82dB TYP.
6. TURN RATIO (@1KHZ, 1Vrms) : PIN 1-5 : 10-6 = 1 $\pm$ 1%
7. HI-POT (@1875VAC, 1mA, 3SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 310 TRANSFORMER	
								DWG. NO. ATS-660	
	RELEASE	06/10/2003	RORY	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						06/10/03			