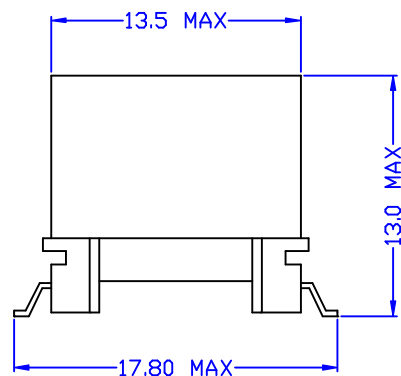
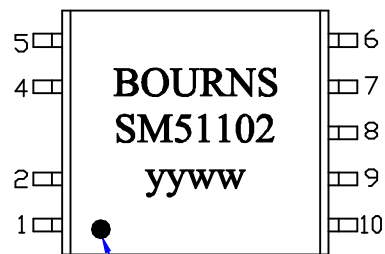


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 1.27 OHM $\pm$ 12%
PIN 9-7 = 0.86 OHM $\pm$ 12%
- INDUCTANCE : (@10KHZ, 0.1Vrms) PIN 1-5 (2-4 SHORT) = 1mH $\pm$ 6%
(@160mADC) PIN 1-5 (2-4 SHORT) = 1mH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4, 9-7 SHORT) = 11uH MAX.
- INSERTION LOSS (@80KHZ, 0dBm, 9-7 W/H 32 OHM) :
PIN 1-5 (2-4 SHORT) = 0.5dB MAX.
- FREQUENCY RESPONSE : $\pm$ 0.5dB, 40K-1MHz, 80KHz REF.
- LONGITUDINAL BALANCE : 50dB MIN., 1K-300KHz
- THD (@20KHZ, 1.85Vrms, 9-7 W/H 32 OHM) :
PIN 1-5 (2-4 SHORT) = -70dB MAX.
- TURN RATIO (@800KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) : 9-7 = 2 $\pm$ 1%
- HI-POT (@2500VAC, 1mA, 1SEC) P-S

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER
								DWG. NO. ATS-662B
	RELEASE	06/30/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						06/30/03		
							DRAW	Pair