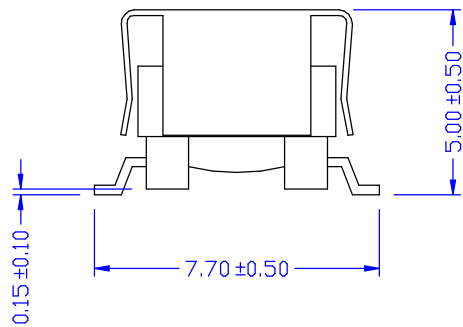
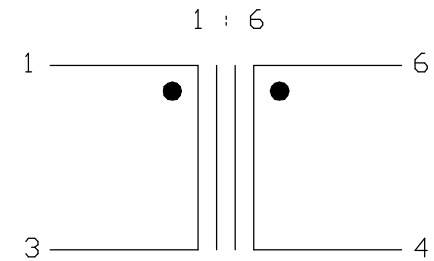
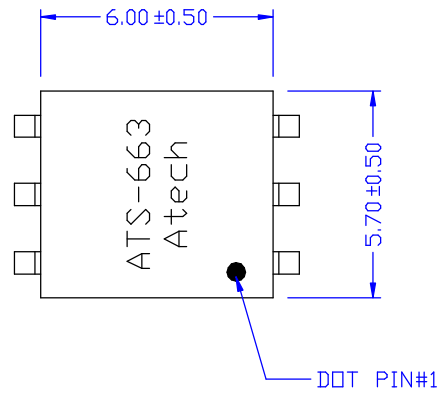


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = $76 \text{ m}\Omega \pm 15\%$, PIN 4-6 = $13.20 \text{ }\Omega \pm 15\%$
2. INDUCTANCE (@10KHz, 0.1Vrms, 0.5A DC) : PIN 1-3 = $22\mu\text{H} \pm 20\%$
3. TURN RATIO (@1.7MHz, 1Vrms): PIN 6-4 : 1-3 = $6 \pm 2\%$
4. INSULATION RESISTANCE (@200VDC, 100 M Ω M, 1MIN) : P-S
4. HI-POT (@150Vrms, 1mA, 2SEC) : P-S

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE INDUCTANCE	
								DWG. NO. ATS-663	
	RELEASE	07/14/2003	RORY	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						07/14/03			