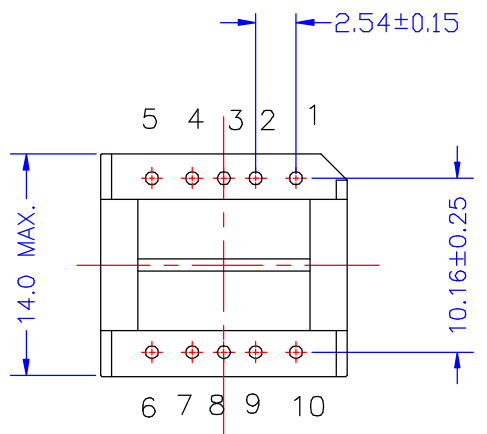


1. D.C.R. : PIN 1-5 = PIN 6-10 = 2.74 OHM ± 12%
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-10 (5-6 SHORT) = 14mH ± 5%
PIN 1-5 = PIN 6-10 = 3.5mH ± 5%
(@100mA DC) : PIN 1-10 (5-6 SHORT) = 11.97mH MIN
(@10KHZ, 0.1Vrms) : PIN 1-5 = PIN 6-10 = 3.49 mH TYP.
3. TURN RATIO (@157KHZ, 1Vrms) : PIN 1-5 : PIN 6-10 = 1 ± 2%
4. INDUCTANCE BALANCE (@1KHZ , 0.1Vrms) : 1 ± 1%
5. HI-POT (@1KVAC, 1mA, 2SEC) : PIN 1-6

						 Atech Technology Co., Ltd. TEL:02794-6667 FAX:02794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-664	
	RELEASE	07/30/2003	RORY	SIMON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						07/30/03		