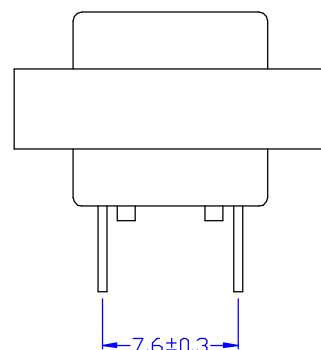
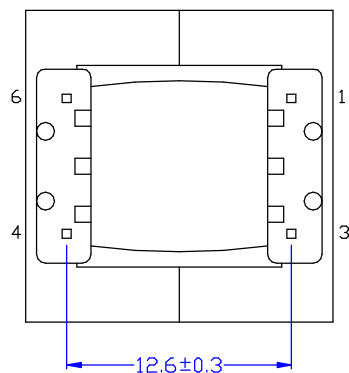
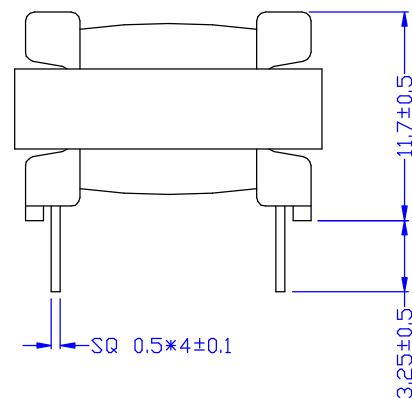
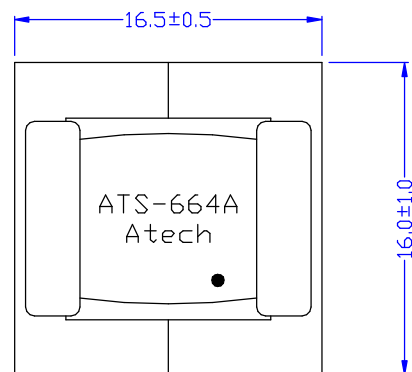


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 1.86 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 14mH $\pm$ 5%
PIN 1-3 = PIN 4-6 = 3.5mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 11.97mH MIN.
(@10KHZ, 1Vrms) : PIN 1-3 = PIN 4-6 = 3.46mH TYP.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@200KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-664A
RELEASE		07/30/2003	RORY	SIMON	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	07/30/03	DRAW <i>Pair</i>