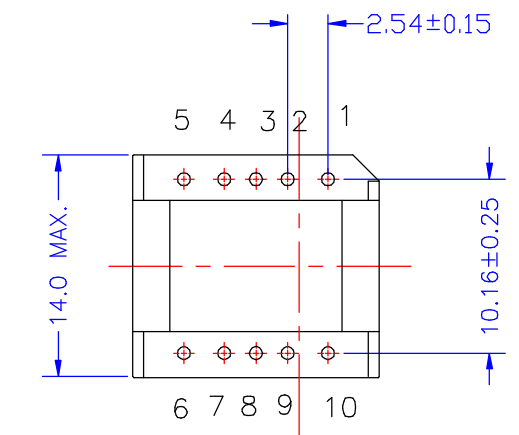


1. D.C.R. : PIN 1-5 = $9.98 \pm 12\%$, PIN 6-10 = $9.92 \pm 12\%$
2. INDUCTANCE (@1KHZ, 0.1Vrms) : PIN 1-10 (5-6 SHORT) = $36\text{mH} \pm 5\%$
PIN 1-5 = PIN 6-10 = $9\text{mH} \pm 5\%$
(@100mADC) : PIN 1-10 (5-6 SHORT) = 30.78mH MIN.
(@10KHZ, 0.1Vrms) : PIN 1-5 = PIN 6-10 = 8.91mH TYP.
3. INDUCTANCE BALANCE (1KHZ, 0.1Vrms) : PIN 1-5 : PIN 6-10 = $1 \pm 1\%$
4. TURN RATIO (@99KHZ, 0.1Vrms) : PIN 1-5 : PIN 6-10 = $1 \pm 2\%$
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-6

						 Atech® Atech Technology Co., Ltd. TEL:0202794-6667 FAX:0202794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-665	
	RELEASE	08/01/2003	RORY	SIMON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						08/01/03		