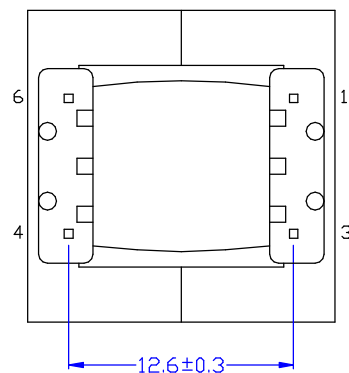
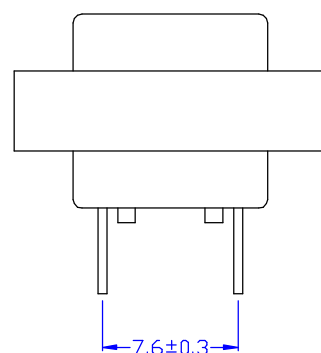
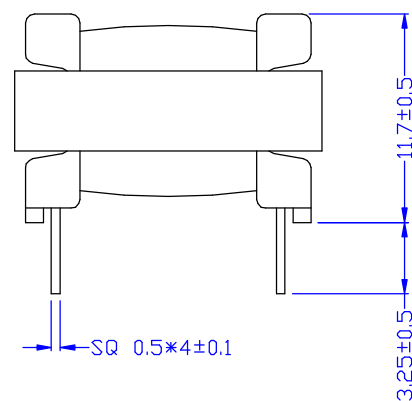
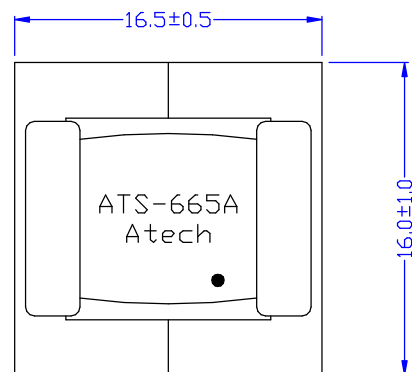


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-3 = 4-6 = 7.77 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-6 (3-4 SHORT) = 36mH $\pm$ 5%
PIN 1-3 = PIN 4-6 = 9mH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 30.78mH MIN.
(@10KHZ, 1Vrms) : PIN 1-3 = PIN 4-6 = 8.95mH TYP.
3. INDUCTANCE BALANCE (@1KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 1%
4. TURN RATIO (@88KHZ, 1Vrms) :
PIN 1-3 : PIN 4-6 = 1 $\pm$ 2%
5. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-665A
RELEASE		07/31/2003	RORY	SIMON	SUEDY	UNITS:	SAFETY	SHEET 1 of 1
NO:		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						07/31/03		Pair