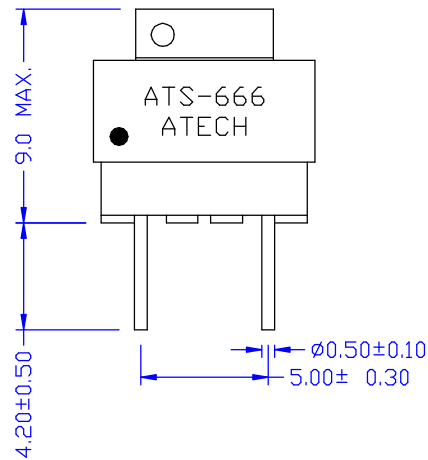



ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = PIN 3-4 = 130 OHM $\pm$ 25%
2. INDUCTANCE (@10KHZ, 1Vrms) : PIN 1-2 = PIN 3-4 = 350mH $\pm$ 25%
3. Q (@10KHz, 1Vrms) : PIN 1-2 = PIN 3-4 = 30 MIN.
4. TURN RATIO (@18KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 $\pm$ 1%
7. HI-POT (@500VAC, 5mA, 2SEC) : PRI-SEC
(@500VAC, 5mA, 2SEC) : PRI - CORE , SEC - CORE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-666	
	RELEASE	08/06/2003	RORY	KEVIN	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/06/03		SHEET 1 OF 1	
REVISIONS								DRAW Pair	