

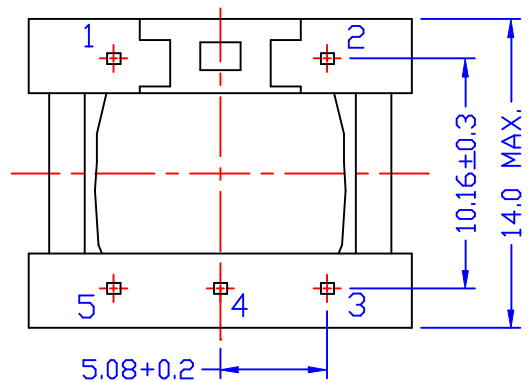


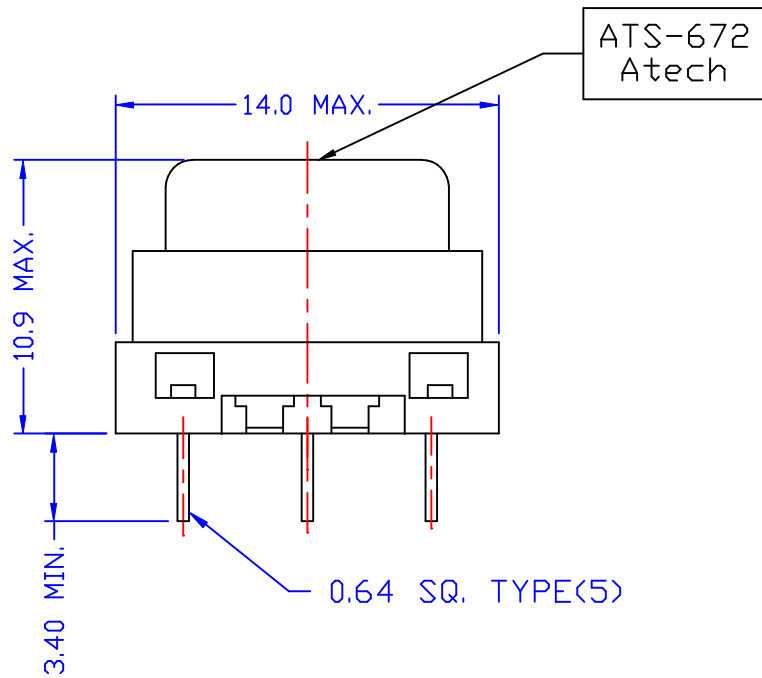

BOTTOM VIEW

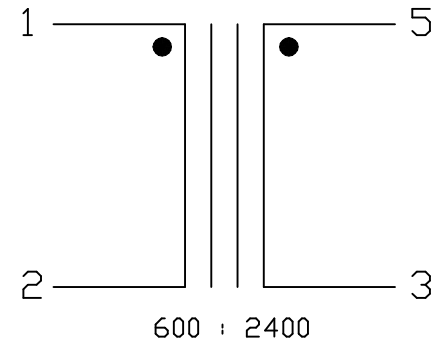

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-5 = 84 OHM MAX. PIN 1-2 = 22 OHM MAX.
- INDUCTANCE : (<@300HZ, 1Vrms>) 1-2 = 0.8H ± 20%
- INSERTION LOSS : (<@1KHZ, 0dBm 3-5 W/H 2.4 KOHM>) 1-2 = 2.5 dB MAX.
- FREQ. RESP. (<@1KHz>) : @300HZ = ± 0.5 dB
@3.5KHZ = ± 0.3 dB
- RETURN LOSS : (<@REF 600 OHM>)
@300HZ = 16 dB MIN.
@1KHZ = 16 dB MIN.
@3.5KHZ = 16 dB MIN.
- TURN RATIO : (<@20KHZ, 1Vrms>) 5-3 : 1-2 = 2 ± 1%
- INSULATION RESISTANCE : (<@100VDC>) = 500M OHM MIN.

						Atech®		TITLE 600 : 2400 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-672	
						TEL:022794-6667 FAX:022794-8004			
RELEASE		09/08/2003	RDY	KEVIN	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/08/03		DRAW Pair	