
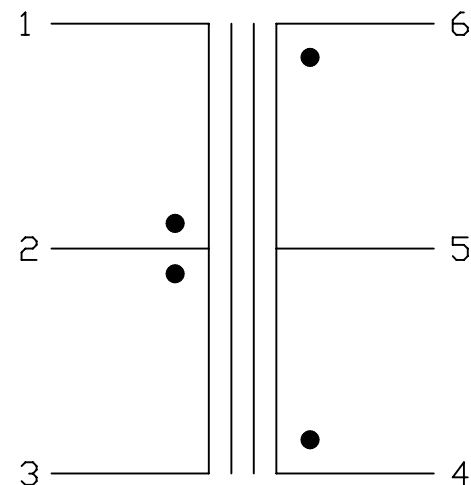

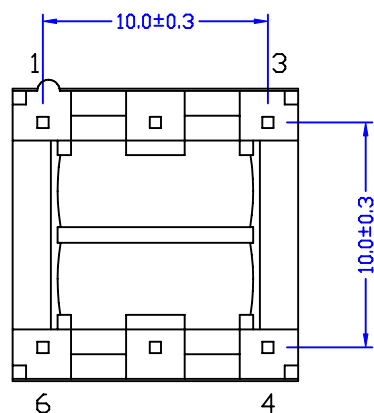
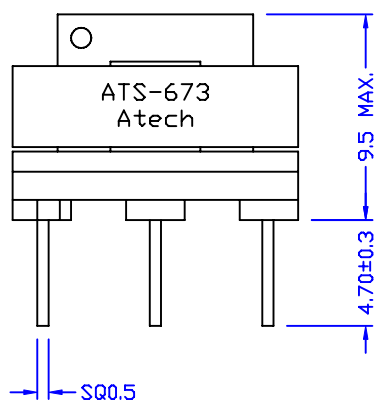


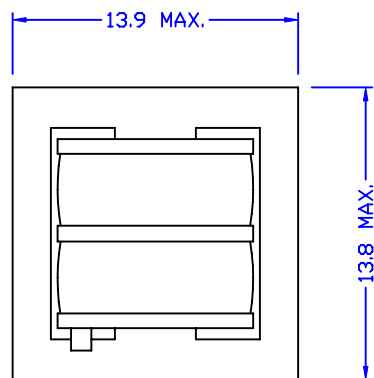

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 4-5 = $3.28 \Omega \pm 12\%$
PIN 2-3 = 5-6 = $0.14 \pm 12\%$
- INDUCTANCE (@1KHz, 0.1Vrms) : PIN 1-2 = $2.82\text{mH} \pm 5\%$
(@120mADC) : PIN 1-2 = 2.54mH MIN.
- TURN RATIO (@179KHz, 0.1Vrms) : PIN 2-1 : 4-5 = $1 \pm 3\%$
(@650KHz, 0.1Vrms) : PIN 2-1 : 6-5 = $29.8 \pm 3\%$
(@300KHz, 0.1Vrms) : PIN 2-1 : 2-3 = $29.8 \pm 3\%$
- HI-POT (@500VDC, 1mA, 2SEC) : PRI - SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE	
								TRANSFORMER	
A	MARKING	01/07 /2004	BART	AL	SUEDY			DWG. NO.	
	RELEASE	09/15 /2003	RORY	SIMON	SUEDY	UNITS:		SAFETY	
						M/M		SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						09/15/03		CTAH13001A	
								DRAW	
								Pair	