

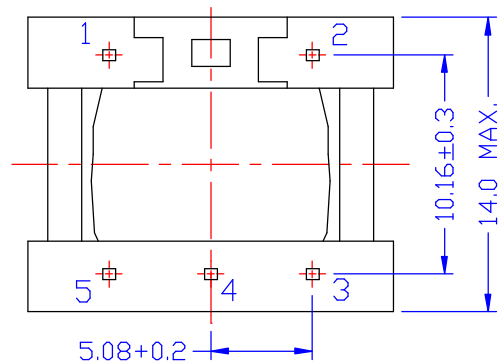


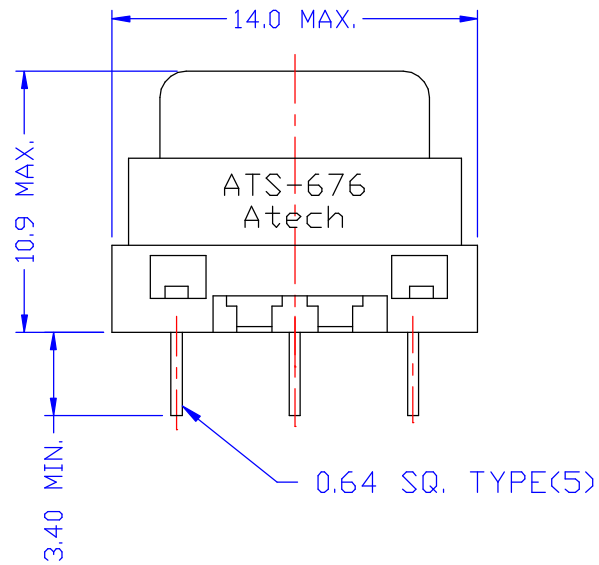

BOTTOM VIEW

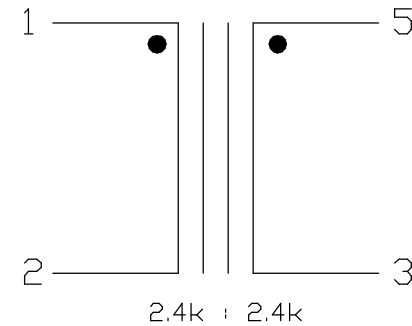

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 112 OHM $\pm$ 12%, PIN 1-2 = 129 OHM $\pm$ 12%
2. INDUCTANCE : (@300HZ, 1Vrms) 1-2 = 3.2H MIN.
3. INSERTION LOSS (@1KHZ, 0dBm 3-5 W/H 2.4 KOHM) : PIN 1-2 = 1.2dB MAX.
4. FREQ. RESP (@1KHz REF.) : @300HZ = $\pm$ 0.5 dB
@3.5KHZ = $\pm$ 0.3 dB
5. RETURN LOSS : (@REF 2.4 KOHM)
@300HZ = 16 dB MIN.
@1KHZ = 16 dB MIN.
@3.5KHZ = 16 dB MIN.
6. TURN RATIO : (@13KHz, 1Vrms) PIN 5-3 : 1-2 = 1 $\pm$ 1%
7. INSULATION RESISTANCE : (@100VDC) = 500M OHM MIN.

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 2. 4K : 2. 4K TRANSFORMER		
A	LABEL	03/02/2004	BART	AL		SUEDY	DWG. NO. ATS-676	
	RELEASE	10/07/2003	RORY	KEVIN		SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK		APPD	DATE 10/07/03	
REVISIONS							SHEET 1 of 1	
							DRAW <i>Pair</i>	