

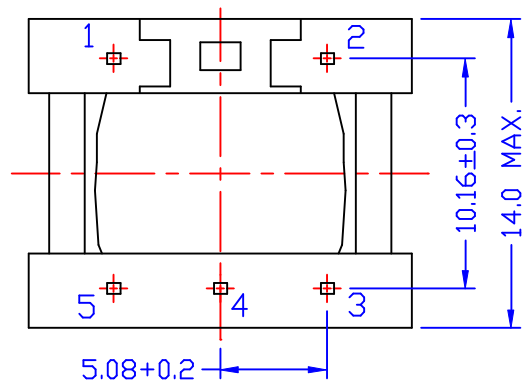


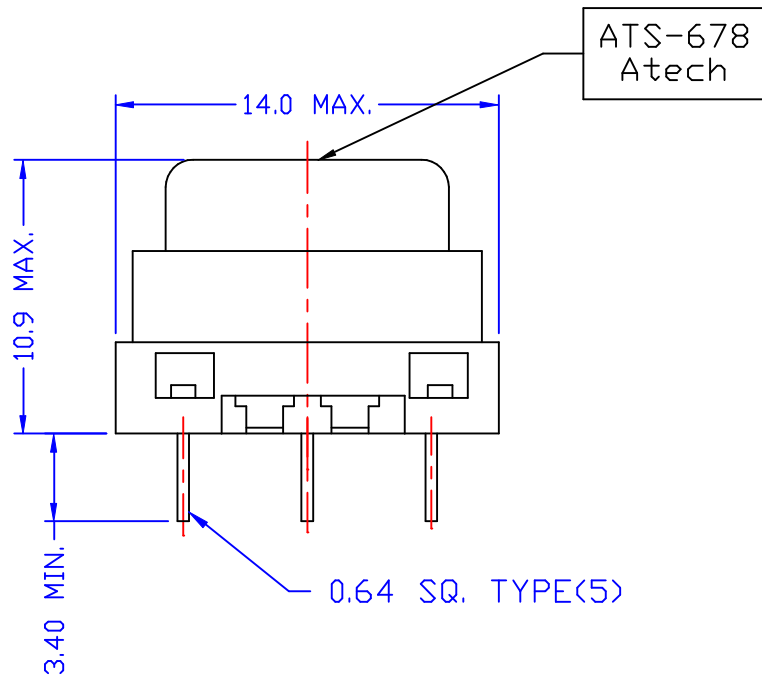

BOTTOM VIEW

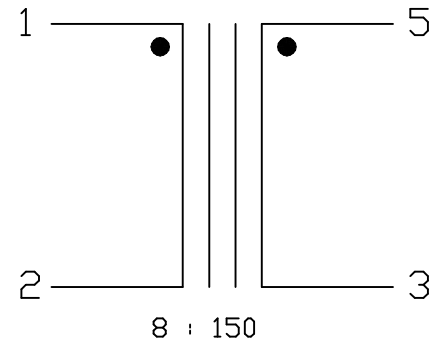

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 10 OHM MAX. PIN 1-2 = 0.55 OHM MAX.
2. INDUCTANCE : (<@300HZ, 1Vrms) 1-2 = 3.80mH MIN.
3. INSERTION LOSS : (<@1KHZ, 0dBm 1-2 W/H 8 OHM) 3-5 = 1.5 dB MAX.
4. FREQ. RESP. : (<@REF 1KHZ)
 - @300HZ = ± 0.5 dB
 - @3.4KHZ = ± 0.3 dB
5. RETURN LOSS : (<@REF 150 OHM)
 - @300HZ = 16 dB MIN.
 - @1KHZ = 16 dB MIN.
 - @3.4KHZ = 16 dB MIN.
6. TURN RATIO : (<@25KHZ, 1Vrms) 5-3 : 1-2 = 4.33 ± 1%
7. INSULATION RESISTANCE : (<@100VDC) = 500M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 8: 150	
								TRANSFORMER	
								DWG. NO.	
								ATS-678	
	RELEASE	10/16 /2003	PAIR	KEVIN	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						10/16/03		SHEET 1 OF 1	
								DRAW <i>Pair</i>	