

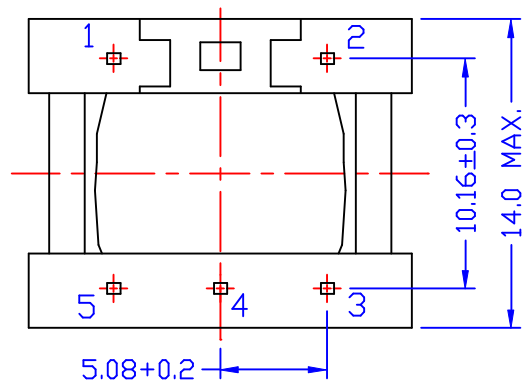


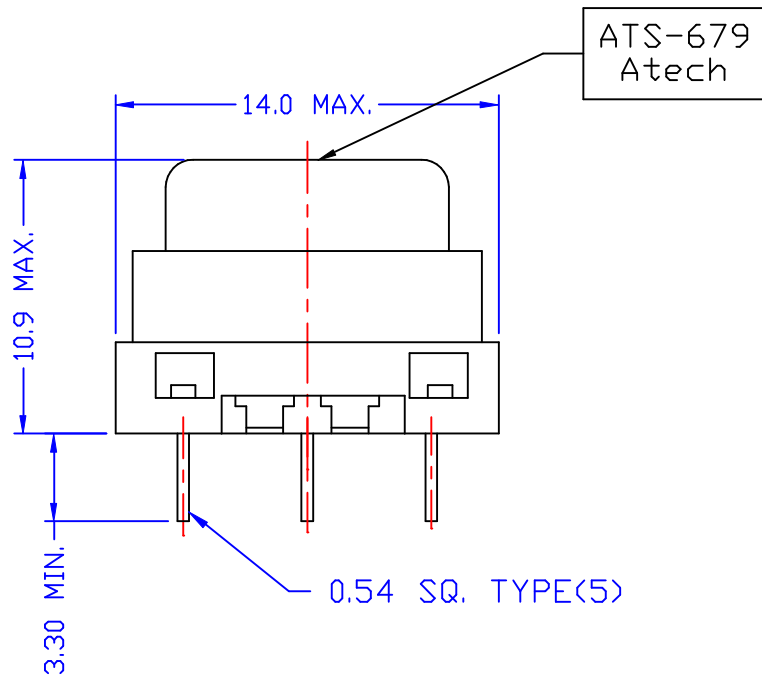

BOTTOM VIEW

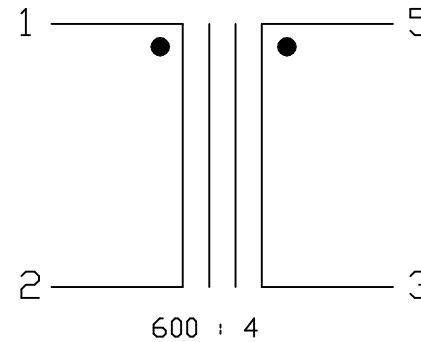

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-5 = 0.25 OHM MAX. PIN 1-2 = 23 OHM MAX.
- INDUCTANCE : (<@300HZ, 1Vrms) 1-2 = 0.7H MIN.
- INSERTION LOSS : (<@1KHZ, 0dBm 3-5 W/H 4 OHM) 1-2 = +/-1.2dB
- FREQ. RESP. : (<@1KHZ REF)
 - 300HZ = ± 0.5 dB
 - 3.4KHZ = ± 0.3 dB
- RETURN LOSS : (<@REF 600 OHM)
 - 300HZ = 16 dB MIN.
 - 1KHZ = 16 dB MIN.
 - 3.4KHZ = 16 dB MIN.
- TURN RATIO : (<@3KHZ, 1Vrms) 1-2 : 5-3 = 12.25 ± 1%
- INSULATION RESISTANCE : (<@100VDC) = 500M OHM MIN.

						Atech®		TITLE 600 : 4 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-679	
						TEL:02-2794-6667 FAX:02-2794-8004			
RELEASE		10/17/2003	PAIR	KEVIN	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						10/17/03		DRAW Pair	