

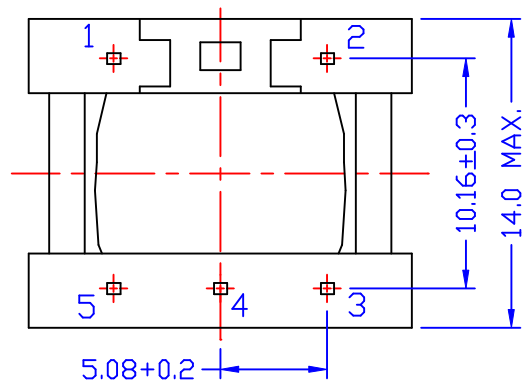


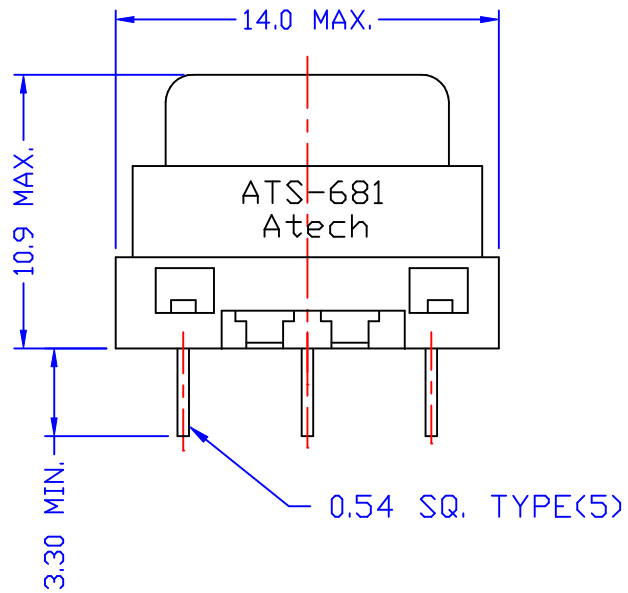

BOTTOM VIEW

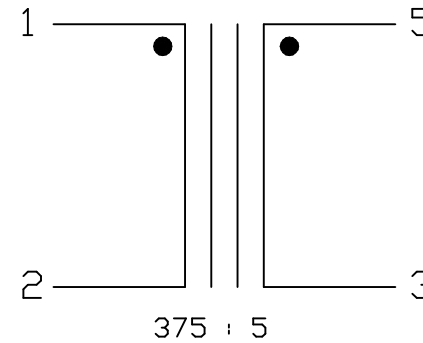

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-5 = 0.36 OHM MAX. PIN 1-2 = 15.5 OHM MAX.
- INDUCTANCE : (<@300HZ, 1Vrms>) 1-2 = 0.35H MIN.
- INSERTION LOSS : (<@1KHZ, 0dBm 3-5 W/H 5 OHM>) 1-2 = 1.2dB MAX.
- FREQ. RESP. : 300HZ = ± 0.5 dB
3.4KHZ = ± 0.3 dB
- RETURN LOSS : (<@375 OHM REF>)
300HZ = 16 dB MIN.
1KHZ = 16 dB MIN.
3.4KHZ = 16 dB MIN.
- TURN RATIO : (<@10KHZ, 1Vrms>) 1-2 : 5-3 = 8.66 ± 1%
- INSULATION RESISTANCE : (<@100VDC>) = 500M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE 375 : 5 TRANSFORMER	
A	LABEL	03/02 /2004	BART	AL	SUEDY		DWG. NO. ATS-681	
	RELEASE	10/20 /2003	PAIR	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						10/20/03		