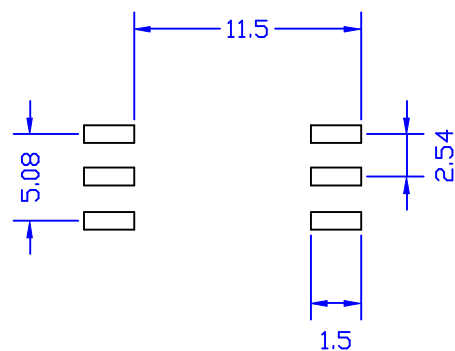
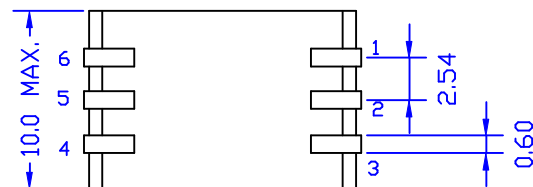
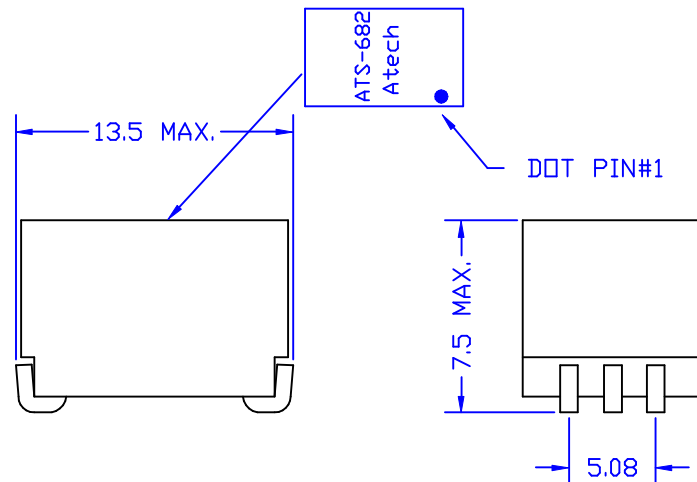


ELECTRICAL CHARACTERISTICS :

1. DCR: PIN 1-3 = 4-6 = 152 OHM +/- 12%
2. INDUCTANCE PARALLEL (@200HZ, 1Vrms)
PIN 1-3 = 4.8H MIN.
3. INSERTION LOSS (@2KHZ, 1Vrms 4-6W/H 430 OHM) :
PIN 1-3 = 3dB MAX.
4. FREQ. RESP (@REF. 2KHZ)
200HZ = +/- 0.2dB 4KHZ = +/- 0.2dB.
5. RETURN LOSS (@REF. 600 OHM)
200HZ - 4KHZ = 16dB MIN.
6. TURN RATIO (@15KHZ, 1Vrms)
PIN 1-3 : 6-4 = 1+/-1%
7. HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 430 TRANSFORMER	
								DWG. NO. ATS-682	
	RELEASE	11/03/2003	PAIR	KEVIN	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						11/03/03		SHEET 1 OF 1	
								DRAW <i>Pair</i>	