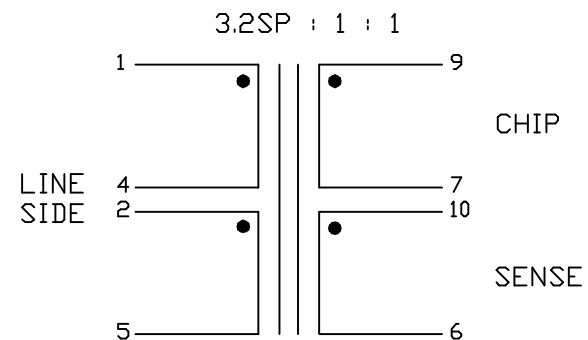

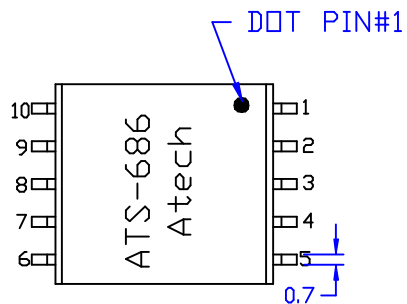


ELECTRICAL CHARACTERISTICS : <MEET B1062 COMPATIBLE>

- DCR :
 - PIN 1-4 = 2-5 = 2 OHM MAX.
 - PIN 9-7 = 0.8 OHM MAX.
 - PIN 10-6 = 5 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
 - PIN 1-5 (2-4 SHORT) = 3mH $\pm$ 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
 - PIN 1-5 (2-4 9-7 10-6 SHORT) = 25uH MAX.
- TURN RATIO (@500KHZ, 1Vrms) :
 - PIN 1-5 (2-4 SHORT) : 9-7 = 3.2 $\pm$ 1%
 - PIN 1-5 (2-4 SHORT) : 10-6 = 3.2 $\pm$ 1%.
- T.H.D (@3KHZ, 3dBm) :
 - PIN 1-5 (2-4 SHORT, 9-7 W/H 13.2 OHM) = -75dB MAX.
- HI-POT (@2000Vrms, 1mA, 2SEC) : PRI-SEC

						Atech®		TITLE SHDSL
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								ATS-686
A	SPEC	01/14/2004	BART	YEN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	11/26/2003	BART	PAIR	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						11/26/03		Pair