
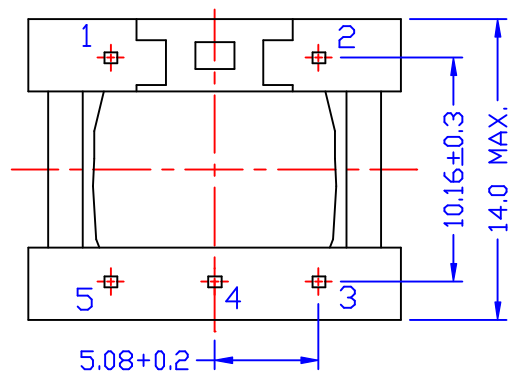
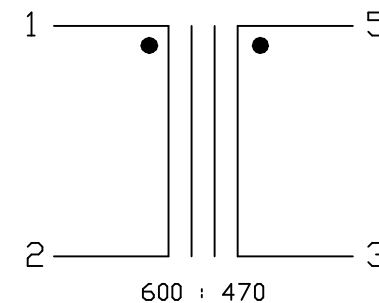
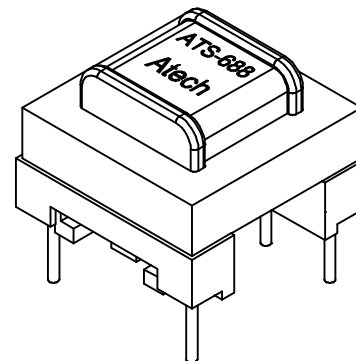


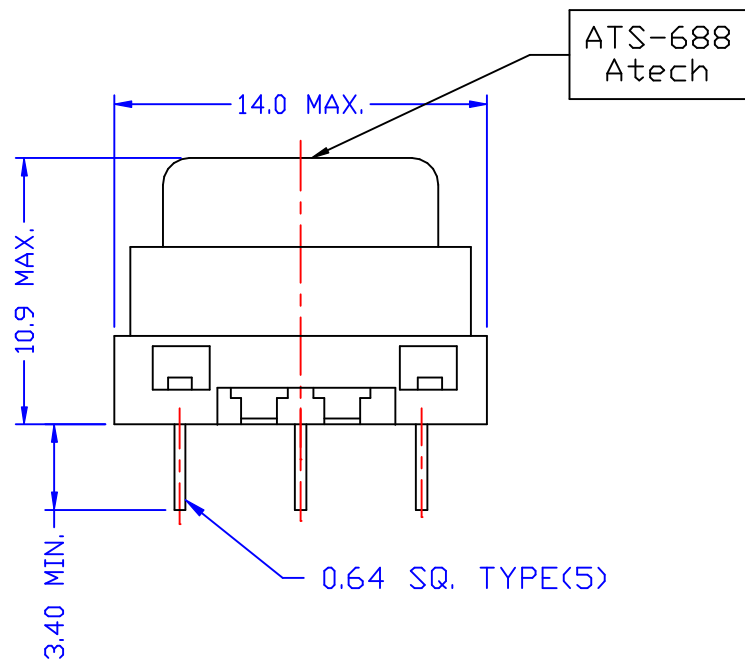

BOTTOM VIEW

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 20 OHM MAX. PIN 3-5 = 17 OHM MAX.
- INDUCTANCE : (<@300HZ, 1Vrms) 1-2 = 0.6H MIN.
- INSERTION LOSS : (<@1KHZ, 0dBm 3-5 W/H 470 OHM) 1-2 = 2.5 dB MAX.
- FREQ. RESP. : @300HZ = ± 0.5 dB
@3.4KHZ = ± 0.3 dB
- RETURN LOSS : (<@REF 600 OHM)
@300HZ = 15 dB MIN.
@1000HZ = 16 dB MIN.
@3.4KHZ = 16 dB MIN.
- TURN RATIO : (<@20KHZ, 1Vrms) 1-2 : 5-3 = $1.13 \pm 1\%$
- INSULATION RESISTANCE : (<@100VDC) = 500M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 470 TRANSFORMER	
								DWG. NO. ATS-688	
	RELEASE	12/04 2003	BART	YEN	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						12/04/03		DRAW <i>Pair</i>	