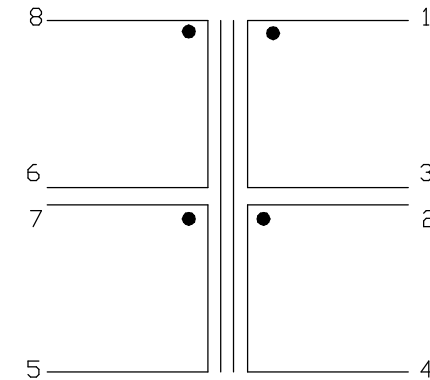

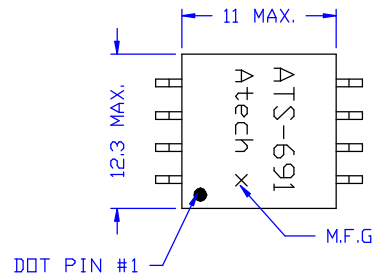


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.56 OHM $\pm$ 12%.
PIN 2-4 = 0.76 OHM $\pm$ 12%.
PIN 5-7 = 0.65 OHM $\pm$ 12%.
PIN 6-8 = 0.65 OHM $\pm$ 12%.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 70uH $\pm$ 5%.
- LEKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-7, 6-8 SHORT) = 5uH MAX.
- I/L (@500KHZ, 0dBm) :
PIN 1-4 (2-3, 6-7 SHORT 5-8 W/H 100 OHM) = 0.65 dB MAX.
- LONGITUDINAL BAL :
20KHZ = 55dB MIN.
500KHZ = 55dB MIN.
1.1MHZ = 55dB MIN.
- THD (@100KHZ, 7Vrms) :
PIN 1-4 (2-3, 6-7 SHORT 5-8 W/H 100 OHM) = -70dB MAX.
- TURN RATIO (@500KHZ, 1Vrms) :
PIN 1-4:8-5 (2-3, 6-7 SHORT) = 1 $\pm$ 1%.
- HI-PDT (@1875VAC, 1mA, 2S) : P-S

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-691	
	RELEASE	02/06/2004	BART	KEVIN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 of 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						02/06/04			<i>Pair</i>