
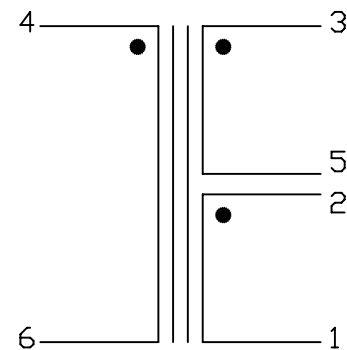
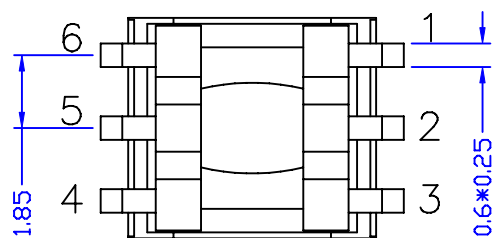
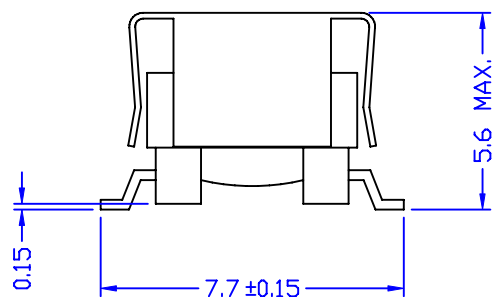


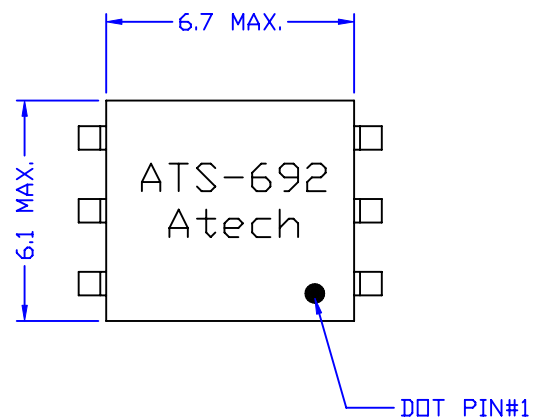

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 0.8 OHM MAX.
PIN 3-5 = 0.8 OHM MAX.
PIN 4-6 = 1.5 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-3 (2-5 SHORT) = 1.4 mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-3 (2-5, 4-6 SHORT) = 0.7uH MAX.
- INTERWINDING CAPL (@100KHZ, 0.1 Vrms) :
PIN 1-6 = (2-5 SHORT) = 45 pF TYP.
- TURN RATIO (@600KHZ, 1Vrms) :
PIN 3-1 : 4-6 (2-5 SHORT) = 1.08 ± 1%.
- HI-POT (@1875VAC, 1mA, 2S) :
PIN 3-4 (2-3 SHORT)
- RoHS COMPLIANCE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATS-692R
RELEASE		02/23/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N:	DRAW
						02/23/04	CTK005005A	Pair