
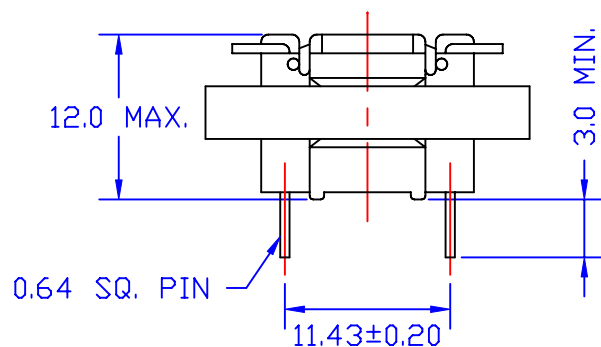



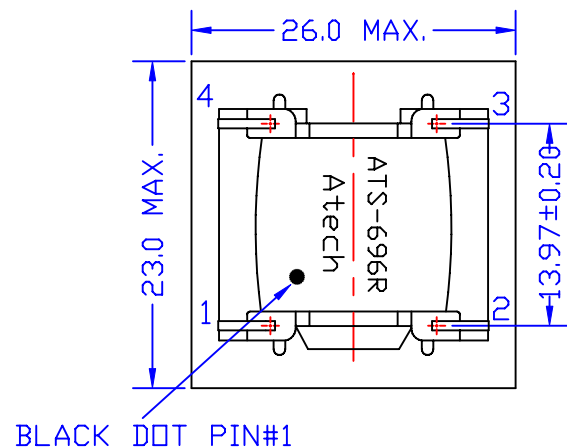

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 48 OHM $\pm$ 10%.
PIN 3-4 = 48 OHM $\pm$ 10%.
- INDUCTANCE PARALLEL (@200HZ, 1Vrms) :
PIN 1-2 = 2.5 H MIN.
- INSERTION LOSS (@1KHZ, 0dBm) :
PIN 1-2 = (4-3 W/H 530 OHM) = 1.1 dB MAX.
- FREQ. RESP (@REF 1KHZ) :
200HZ ~ 4KHZ = $\pm$ 0.2 dB.
- RETURN LOSS (@REF 600 OHM) :
200HZ ~ 4KHZ = 20 dB MIN.
- LONGITUDINAL BAL. :
200HZ ~ 1KHZ = 60 dB MIN.
1KHZ ~ 4KHZ = 40 dB MIN.
- TURN RATIO (@12KHZ, 0.1Vrms) :
PIN 4-3:1-2 = 1 $\pm$ 2%.
- HI-POT (@1875VAC, 1mA, 2S) : P-S
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE 600 : 530 TRANSFORMER	
								DWG. NO. ATS-696R	
	RELEASE	02/26/2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 of 1	
REVISIONS						02/26/07		DRAW <i>Pair</i>	