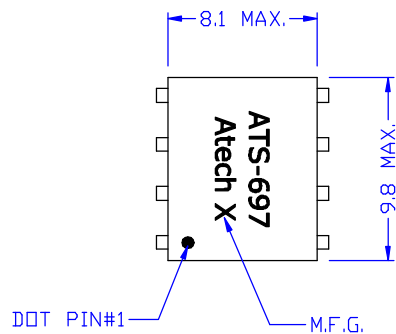


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2.3 OHM MAX.
PIN 2-4 = 3 OHM MAX.
PIN 5-7 = 3.2 OHM MAX.
PIN 6-8 = 3.2 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1 Vrms) :
PIN 1-4 (2-3 SHORT) = 1mH $\pm$ 7%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-7, 6-8 SHORT) = 10.5uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 15 pF MAX.
- THD (@25KHZ, 5Vrms) :
PIN 1-4 (2-3, 6-7 SHORT, 8-5 W/H 123 OHM) = -78 dB MAX.
- TURN RATIO (@30KHZ, 1Vrms) :
PIN 1-4 : 8-5 (2-3, 6-7 SHORT) = 0.9 $\pm$ 1%.
- HI-POT (@1500VAC, 1mA, 2S) : P-S

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL LINE TRANSFORMER	
							DWG. NO.	ATS-697
	RELEASE	04/09/2004	BART	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						04/09/04		