

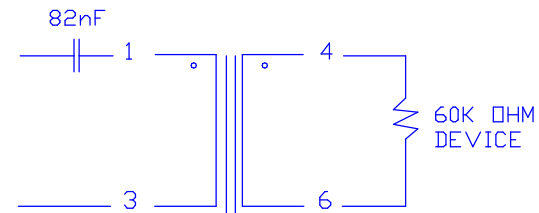




M.F.G.



60K : 60K



ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 2.9K OHM MAX.
PIN 4-6 = 3.7K OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-3 = 33H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms) :
PIN 1-3 <4-6 W/H 60K OHM) = 60K OHM $\pm$ 10%.
4. INSERTION LOSS (@1KHZ, 1Vrms) :
PIN 1-3 <4-6 W/H 60K OHM) = 1dB MAX.
5. FREQ RESP (@REF 1KHZ) :
300HZ = $\pm$ 0.5 dB.
4KHZ = $\pm$ 0.5 dB.
6. RETURN LOSS (@REF 60K OHM) :
200HZ = 22 dB MIN.
1KHZ = 25 dB MIN.
4KHZ = 25 dB MIN.
7. TURN RATIO (@8KHZ, 1Vrms) :
PIN 1-3 : 4-6 = 1 $\pm$ 1%.
8. HI-POT (@12KVAC, 1mA, 2S) : P-S

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 60K : 60 K TRANSFORMER	
							DWG. NO. ATS-698	
							SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SAFETY	DRAW Pair
REVISIONS						04/08/04		
RELEASE		04/08/2004	BART	KEVIN	SUEDY	UNITS: M/M		