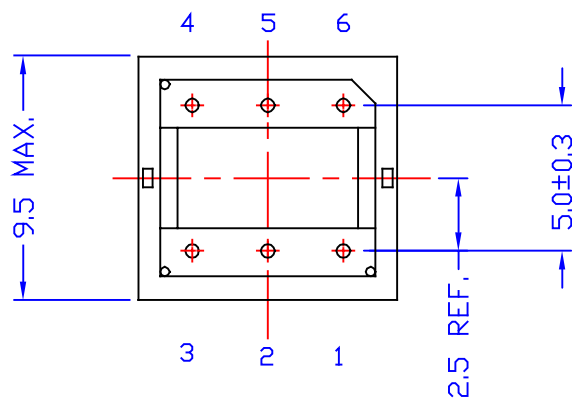


1. DCR : PIN 3-1 = 6-4 = 3.5 Ω HM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-6 (3-4 SHORT) = 1.21mH $\pm$ 9%
3. TURN RATIO (@630KHZ, 0.1V) :
PIN 4-6 : 1-3 = 1 $\pm$ 1%
4. HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-4,1-C,4-C

					 Atech[®] Atech Technology Co., Ltd. TEL: 02794-6667 FAX: 02794-8804		TITLE: INDUCTOR FOR ISDN/ADSL SPLITTER	
A	T/R	05/26/2004	BART	AL			SUEDY	DWG. NO.
	RELEASE	05/04/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS								