

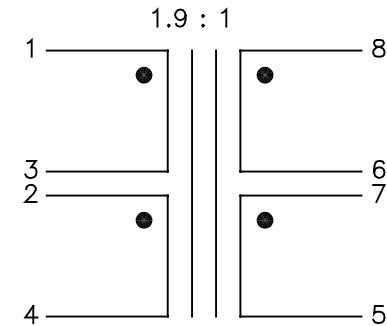
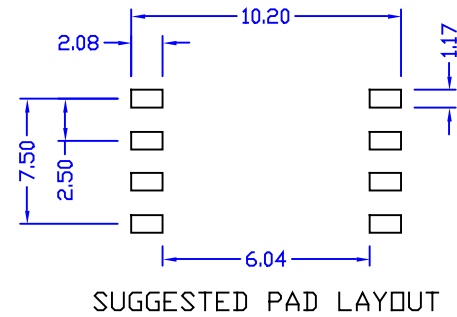
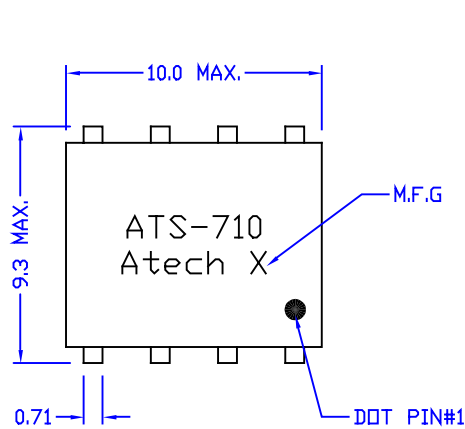


ELECTRICAL CHARACTERISTICS :

1. DCR. : PIN 1-4(2+3) = 1 OHM MAX; PIN 5-8(6+7) = 1 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2+3) = 400 uH ±5%.
3. TURNS RATIO :
PIN 1-4:8-5 (2+3, 5+7) = 1.9 ±2%.
4. LEAKAGE INDUCTANCE(@100KHZ,0.1Vrms)
PIN 1-4(2+3, 6+7, 5+8) = 7 uH MAX.
5. THD (@50KHZ, 7.5VPP) : -88dB MAX.
6. HI-POT (@1500VAC, 1mA, 2S) :
PIN 1-8 (2+3, 6+7).
(@400VAC, 1mA, 1min)
PIN 1-4

						Atech®		TITLE	ADSL
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:022794-6667 FAX:022794-8004		DWG. NO.	ATS-710
RELEASE		06/23	PAIR	SUEDY	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	06/23/04		Pair