
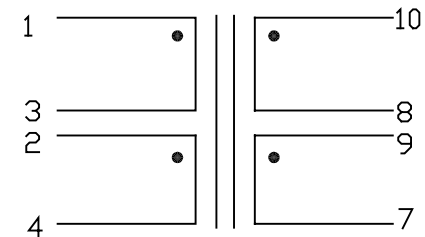
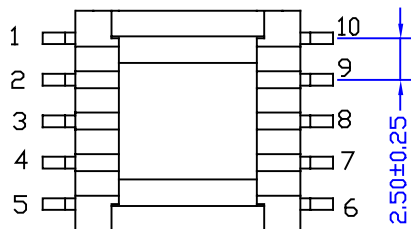



M.F.G.

DOT PIN#1

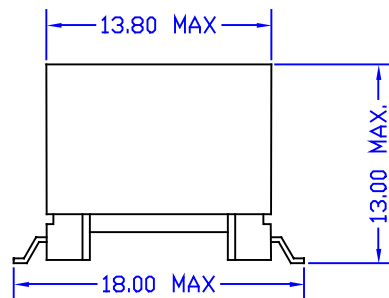

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 80 mΩ MAX.
PIN 2-4 = 80 mΩ MAX.
PIN 7-9 = 488 mΩ MAX.
PIN 8-10 = 488 mΩ MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 7-10 (8-9 SHORT) = 440uH±5%.
PIN 7-10 W/H 0.7ADC (8-9 SHORT) = 400uH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms):
PIN 7-10 (8-9, 1-2, 3-4 SHORT) = 10uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-10 (2-3, 8-9 SHORT) = 40pF MAX.
- TURN RATIO (@10KHZ, 1Vrms, 2-3, 8-9 SHORT) :
PIN 10-7:1-4 = 4±3%.
- HI-POT (@1875VAC, 1mA, 1S) : PRI-SEC.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:0282794-6667 FAX:0282794-8004		DWG. NO.
								ATS-711
RELEASE		07/01/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	07/01/04	DRAW
								Pair