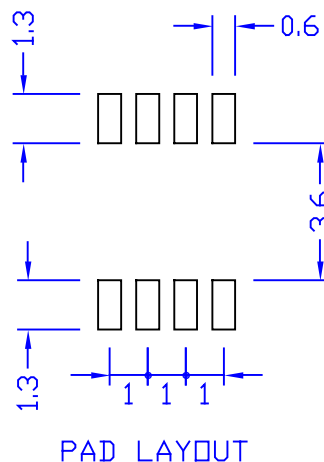
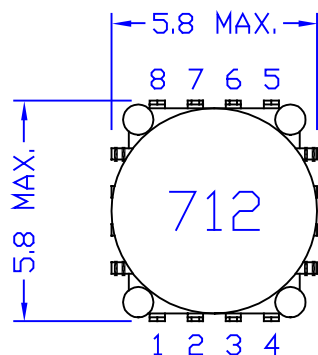


SOLDER *6

ELECTRICAL CHARACTERISTICS :

1. INDUCTANCE (@100KHZ, 20mVrms) :
PIN 5,6-7,8 = 6.0 μ H $\pm$ 15%.
2. LEAKAGE INDUCTANCE (@100KHZ, 20mVrms) :
PIN 5,6-7,8 (1-4 SHORT) = 200nH MAX.
3. DC RESISTANCE :
PIN 5,6-7,8 = 100 m Ω M MAX.
PIN 1-4 = 7.1 Ω M MAX.
4. CAPACITANCE :
PIN 5,6-1 = 30 pF MAX.
5. WITHSTANDING VOLTAGE :
PRI.-SEC. = 500 Vrms.

NONE TOLERANCE FOR REFERENCE

						Atech®		TITLE PHOTOFLASH CAPACITOR CHARGING TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-712	
						TEL:022794-6667 FAX:022794-8004			
RELEASE		07/05	BART	PAIR	SUEDY	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/05/04		DRAW Pair	