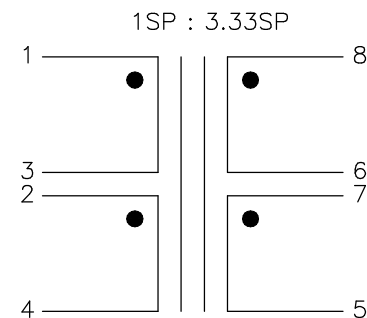
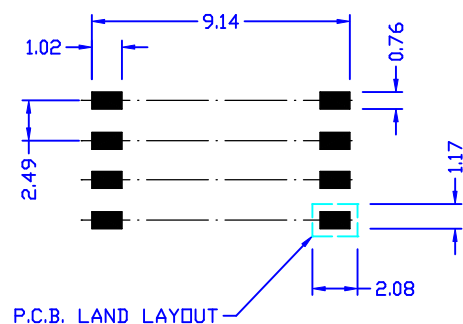
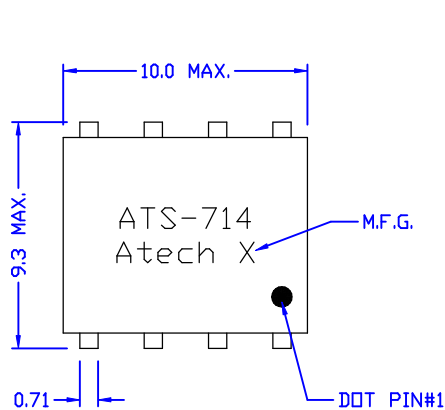


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 0.22 OHM MAX.
PIN 8-6 = 7-5 = 0.55 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 8-5 (6-7 SHORT) = 800 uH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 8-5 (6-7, 1-2-3-4 SHORT) = 10uH MAX.
- TURN RATIO (@10KHZ, 0.1Vrms) :
PIN 8-5:1-4 (2-3, 6-7 SHORT) = 3.33 ± 2%
- HI-POT (@1500VAC, 1mA, 1MIN) :
PRI-SEC (2-3, 6-7 SHORT)

NONE TOLERANCE FOR REFERENCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE	ADSL TRANSFORMER
								DWG. NO.	ATS—714
	RELEASE	10/08/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 10F	1
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS									