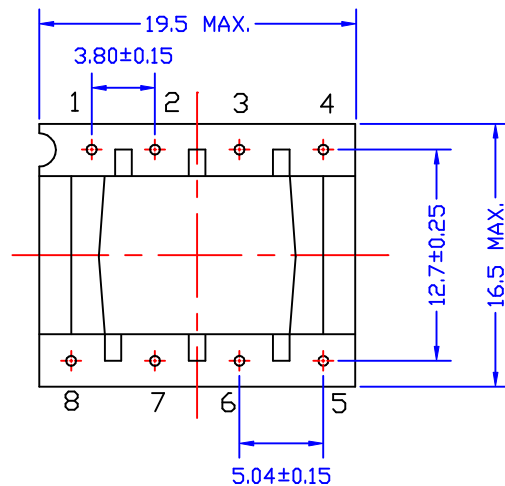
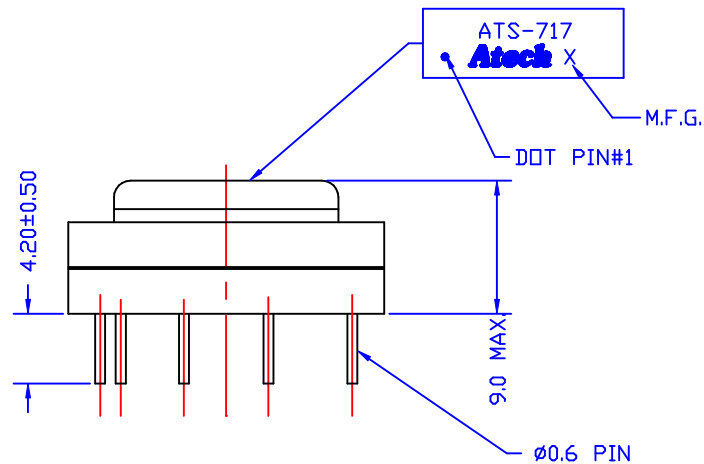


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 2-3 = 120 OHM MAX.
PIN 6-7 = 45 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms W/H 80mADC) :
PIN 2-3 = 130 mH MIN.
3. IMPEDANCE
(@800HZ, 1Vrms W/H 80mADC, 6-7 W/H 150 OHM LOAD) :
PIN 2-3 = 600 OHM ±10%.
4. INSERTION LOSS
(@1KHZ, 0dBm W/H 80mADC, 6-7 W/H 150 OHM LOAD) : 3.2 db MAX.
5. FREQ RESP (@REF 1KHZ) :
300HZ = ±4 dB.
3.4KHZ = ±1 dB.
6. RETURN LOSS (@300HZ W/H 80mADC) : 5 dB MIN.
7. LONGITUDINAL BAL :
1KHZ = 60 dB MIN.
3.4KHZ = 60 dB MIN.
8. HI-POT (@1500VAC, 1mA, 1MIN) : PRI-SEC.

					Atech [®]		TITLE 600 : 150 TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO. ATS-717	
					TEL:02/2794-6667 FAX:02/2794-8004			
RELEASE		10/12/2004	BART	MICHAEL	SUEDY	UNITS M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						10/12/04	SHEET 1 OF 1	
							DRAW Pair	