

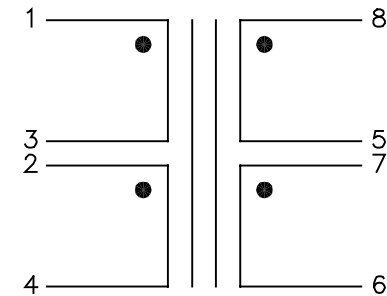
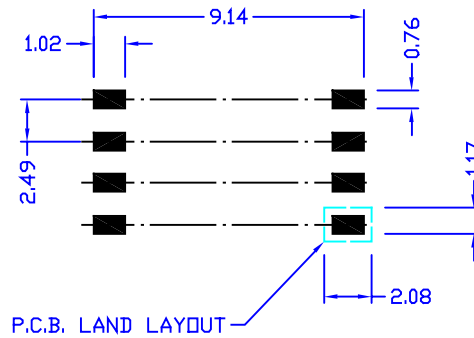
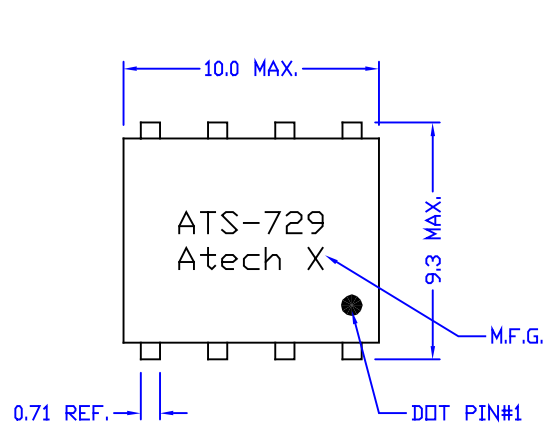


ELECTRICAL CHARACTERISTICS (S560-6600-HE COMPATIBLE) :

- DCR : PIN 1-3 = 700 mΩ MAX.
PIN 2-4 = 700 mΩ MAX.
PIN 5-8 = 220 mΩ MAX.
PIN 6-7 = 220 mΩ MAX.
- INDUCTANCE (@1KHZ, 0.1mVrms) :
PIN 1-4 (PIN 2-3 SHORT) = 392 uH ±5%.
PIN 6-8 (PIN 5-7 SHORT) = 24.5 uH ±5%.
- LEAKAGE INDUCTANCE
(@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 6-7, 5-8 SHORT) = 6 uH MAX.
- TURN RATIO (@10KHZ, 0.1Vrms) :
PIN 1-4:8-6 (2-3, 5-7 SHORT) = 4 ±1%.
- HI-POT (@500VAC, 1mA, 2SEC) : PRI.-SEC.

						Atech®		TITLE	TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-729
						TEL:02-2794-6667 FAX:02-2794-8004			
RELEASE		12/30/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	DRAW Pair
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	12/30/04		