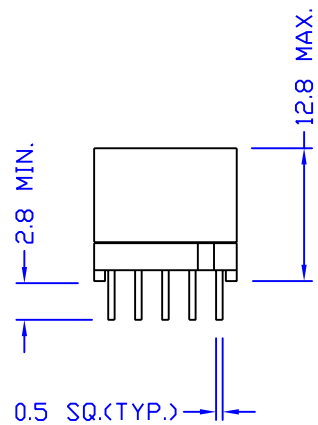



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 4.9 Ω HM $\pm 10\%$
PIN 5-6 = 4.9 Ω HM $\pm 10\%$
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-10 = 5.65 mH $\pm 5\%$
PIN 1-6 (5-10 SHORT) = 22.6 mH $\pm 5\%$
PIN 1-6 (5-10 SHORT, W/H 80 mA) = 21.47 mH MIN.
- TURN RATIO (@15KHZ, 1Vrms) :
PIN 1-10:5-6 = 1 $\pm 1\%$
- HI-POT (@500VAC, 1mA, 2S) :
PRI-SEC, SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-738	
	RELEASE	03/16/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/16/05			