

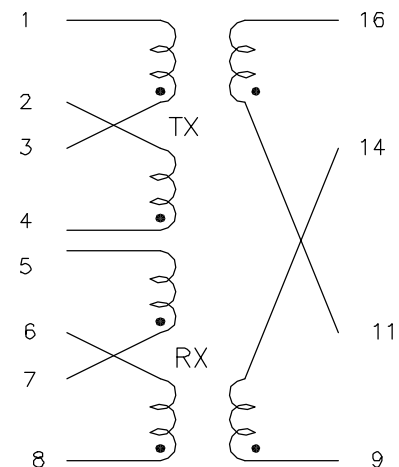
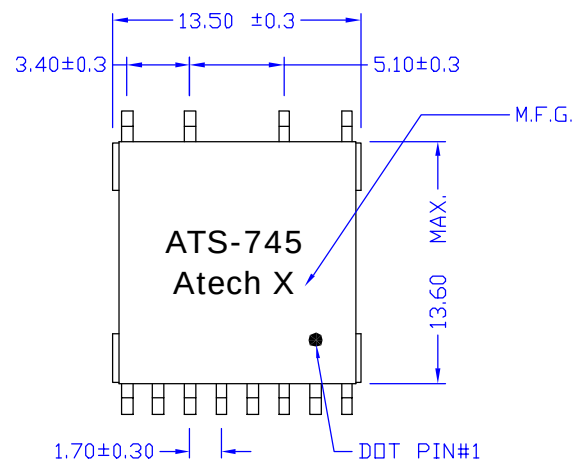


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 9-16 (11-14 SHORT) = 6.55 OHM MAX.
PIN 1-4 (2-3 SHORT) = 0.86 OHM MAX.
PIN 5-8 (6-7 SHORT) = 2.6 OHM MAX.
- INDUCTANCE (@10KHz, 50mVrms) :
PIN 16-9 (14-11 SHORT) = 1.4 mH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 50 mVrms, ALC OFF) :
PIN 16-9 (1-4, 2-3, 11-14 SHORT) = 15 uH MAX.
PIN 16-9 (5-8, 6-7, 11-14 SHORT) = 20 uH MAX.
- TURN RATIO (@150KHz, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) : 1-4 (2-3 SHORT) = 4.4 ±1%.
PIN 16-9 (11-14 SHORT) : 5-8 (6-7 SHORT) = 2 ±1%.
- HI-POT (@1875VAC, 1mA, 2S) :
PIN 1-16 (2-3, 6-7, 11-14 SHORT)

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-745
A	SPEC. & DIM.	06/10/2005	BART	EEFLYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	04/12/2005	BART	MICHAEL	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						04/12/05		Pair