

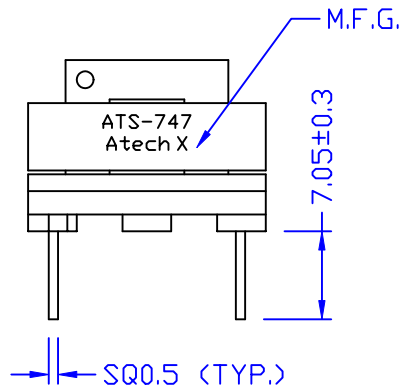



ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 9.23 Ω HM $\pm 10\%$.
PIN 4-6 = 9.23 Ω HM $\pm 10\%$.
- INDUCTANCE :
(@1KHz, 0.1Vrms)
PIN 1-3 = 4-6 = 4mH $\pm 5\%$.
(@1KHz, 0.1Vrms, W/H 100mADC)
PIN 1-6 = (3-4 SHORT) = 15.2mH MIN.
- TURN RATIO(@20KHz, 0.1Vrms) :
PIN 1-3:4-6 = 1 $\pm 1\%$.
- HI-POT (@500VAC, 1mA, 2S) :
PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-747	
	RELEASE	04/13/2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						04/13/05			