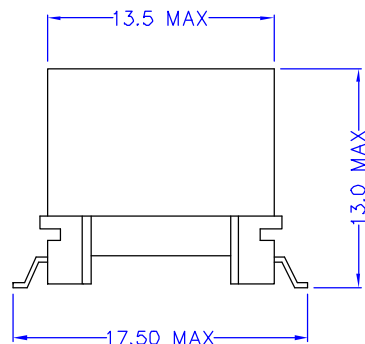
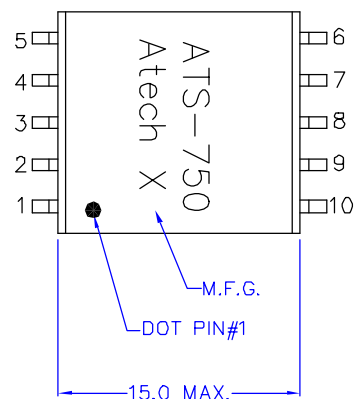


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 420 mOHM $\pm$ 15%.
PIN 2-5 = 420 mOHM $\pm$ 15%.
PIN 9-6 = 245 mOHM $\pm$ 15%.
PIN 10-7 = 185 mOHM $\pm$ 15%.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410uH $\pm$ 5%
3. LEAKAGE INDUCTANCE (@300KHz, 0.1Vrms) :
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 6.2uH $\pm$ 40%
4. CAPACITANCE (@100KHz, 0.1Vrms) :
PIN 1-10 (2-4,7-9 SHORT) = 22 pF $\pm$ 30%.
5. T.H.D. (@30KHz, 3.162 Vrms, 2-4, 7-9 SHORT,
1-5 W/H 100 OHM, 6-10 W/H 25 OHM) : -85 dB MAX.
6. TURN RATIO (@1MHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) : 10-6 (9-7 SHORT) = 2 $\pm$ 2%
6. HI-POT (@1875VAC, 1mA, 2SEC) :
PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6687 FAX:(02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-750	
	RELEASE	05/05/2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						05/05/05			