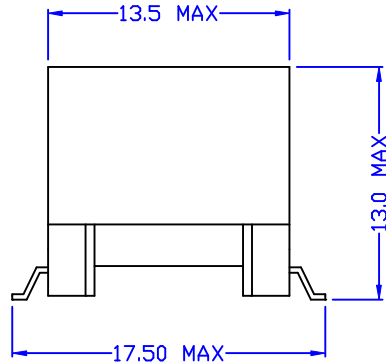
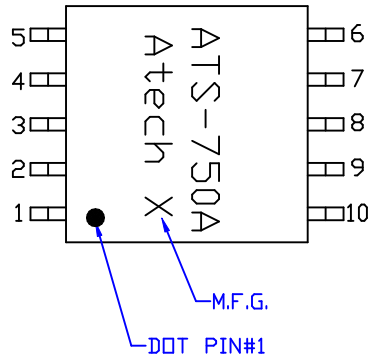


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4= 2-5= 500 mOHM MAX
PIN 9-6 = 10-7 = 257 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410 uH $\pm$ 5%.
- LEAKAGE INDUCTANCE (@300KHz, 0.1Vrms) :
PIN 1-5 (2-4,6-7-9-10 SHROT) = 8.6 uH MAX.
- INTERWINDIG CAP(@100KHz, 0.1Vrms) :
PIN 1-10 (2-4, 7-9 SHROT) = 37 pF MAX.
- TURN RATIO (@1MHz, 0.1Vrms) :
PIN 1-5 (2-4 SHROT) : 10-6 (9-7 SHROT) = 2 $\pm$ 2%.
- HI-POT (@1875VAC, 1mA, 2S) :
PRI-SEC
- RoHS COMPLIANCE

						Atech®		TITLE	ADSL TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-750HR
						TEL:022794-6667 FAX:022794-8004			
RELEASE	02/20/2006	PAIR	EEFLYS	SUEDY	UNITS:	M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N :	DRAW	Pair
REVISIONS						02/20/06	CTA41300ZA		