
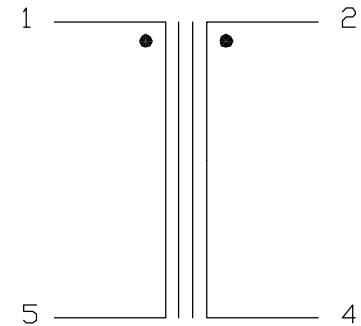
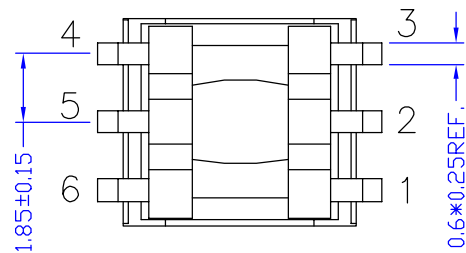
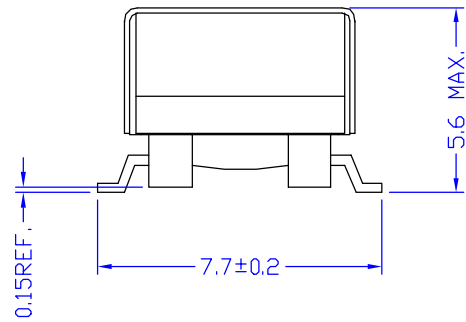


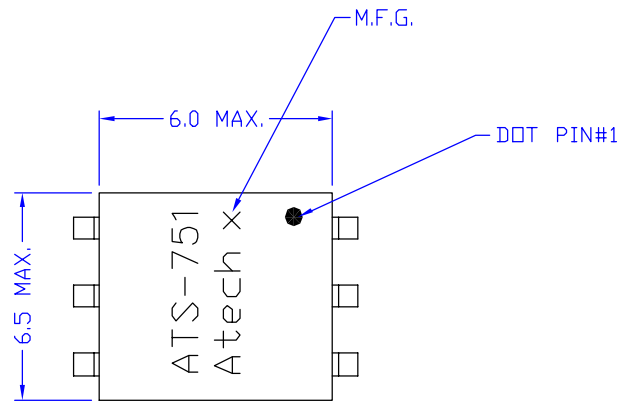

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 70 mΩH ±10%.
PIN 2-4 = 70 mΩH ±10%.
- INDUCTANCE (@10KHZ, 10mVrms) :
PIN 1-5 = 2.5 uH ±15%.
PIN 2-4 = 2.5 uH ±15%.
- LEAKAGE INDUCTANCE (@10KHZ, 10mVrms) :
PIN 1-4 (2-5 SHORT) = 10uH ±15%.
- INTERWINDING CAPL (@100KHZ, 100mVrms) :
PIN 1-2 = 40 pF MAX.
- TURN RATIO (@3MHZ, 0.1Vrms) :
PIN 1-5 : 2-4 = 1 ± 8%.
- HI-POT (@850VDC, 0.5mA, 2SEC) :
PIN 1-2

					Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004	TITLE TRANSFORMER		
						DWG. NO. ATS-751		
A	PIN NO. & SPEC.	06/10/2005	BART	ANDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	05/09/2005	BART	FRANK	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						05/09/05		