

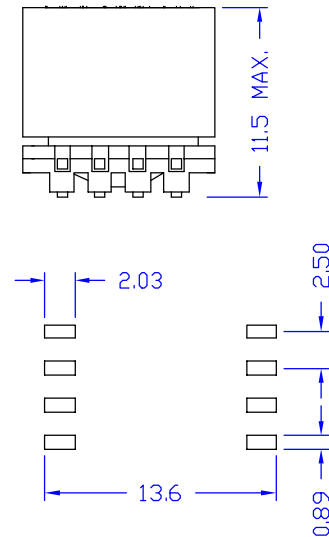
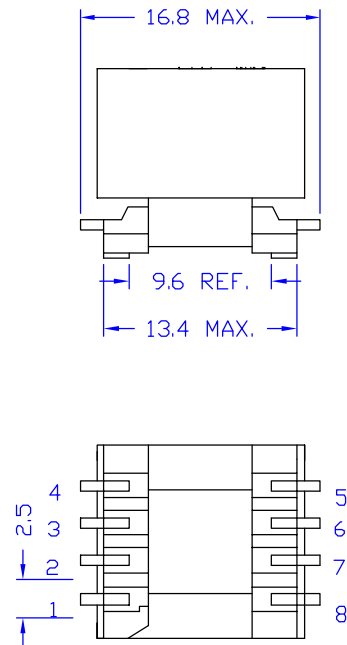


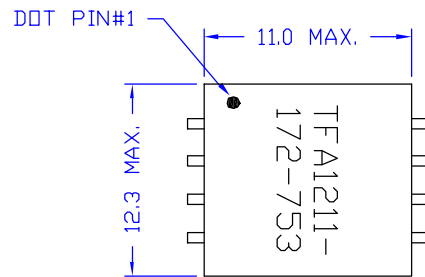

SUGGESTED PAD LAYOUT

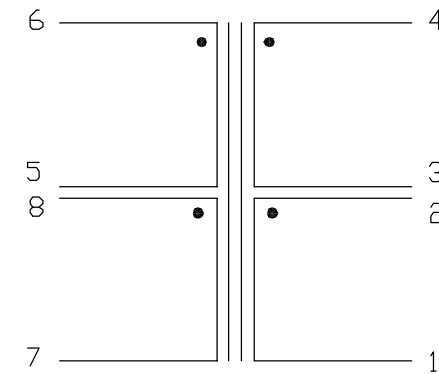

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 1.6 OHM MAX.
PIN 3-4 = 1.6 OHM MAX.
PIN 5-6 = 0.8 OHM MAX.
PIN 7-8 = 0.8 OHM MAX.
- INDUCTANCE :
(@10KHz, 0.1Vrms)
PIN 5-8 (6-7 SHORT) = 1.7 mH MIN.
(@10KHz, 0.1Vrms, W/H 85 mADC)
PIN 5-8 (6-7 SHORT) = 1.7 mH MIN.
- LEAKAGE INDUCTANCE (@10KHz, 1mVrms) :
PIN 5-8 (6-7 , 1-2-3-4 SHROT) = 10 uH MAX.
- INTERWINDING CAP (@10KHz, 0.1Vrms) :
PIN 4-5 (2-3 , 6-7 SHORT) = 180 pF MAX.
- HI-POT :
(@1.5KV, 1mA, 2S) :
PIN 1-5 (2-3, 6-7 SHORT)
(@0.5KV, 1mA, 2S) :
PIN 1-8 (2-5, 4-7 SHROT)
- TURN RATIO (@80KHZ, 0.1Vrms) :
PIN 1-4:5-8 (2-3,6-7 SHORT) = 2 ±2%.
- RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		DWG. NO.
								ATS-753R
RELEASE		09/19/2005	BART	LYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						09/19/05		Pair