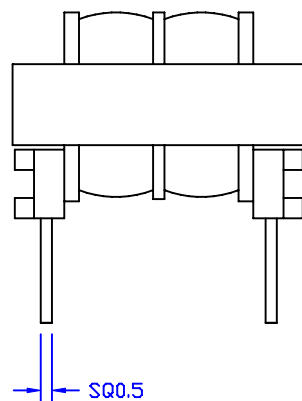
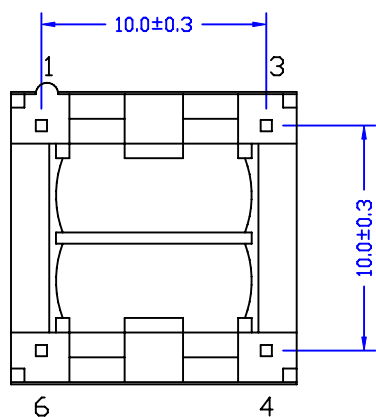
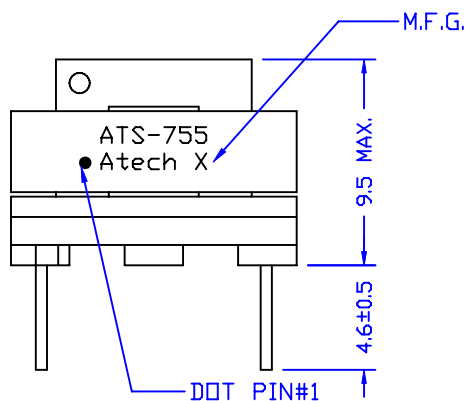
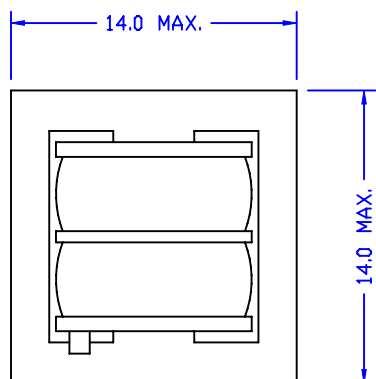


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 9.5 Ω HM $\pm$ 10%
PIN 4-6 = 9.5 Ω HM $\pm$ 10%
- INDUCTANCE (<@1KHZ, 0.1Vrms) :
PIN 1-3 = 10.21mH $\pm$ 3%
PIN 4-6 = 10.21mH $\pm$ 3%
- TURN RATIO (<@100KHz, 0.1Vrms) :
PIN 1-3 : 4-6 = 1 $\pm$ 2%
- HI-POT (<@500VAC, 1mA, 2SEC) : PRI-SEC

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE INDUCTOR		
B	DCR. L	07/17/2006	PAIR	MICHAEL		EUGENE	DWG. NO. ATS-755	
A	SPEC.	08/29/2005	BART	MICHAEL		SUEDY		
	RELEASE	05/25/2005	BART	MICHAEL		SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK		APPD	DATE 05/25/05	P/N: CTAH13010A
REVISIONS						SHEET 1 OF 1 DRAW <i>Pair</i>		