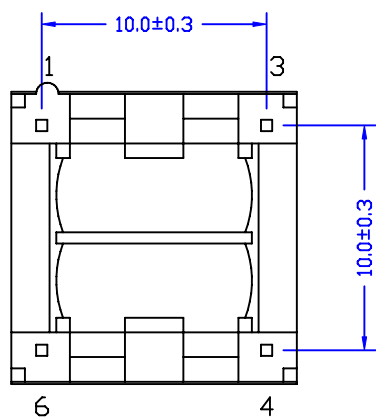
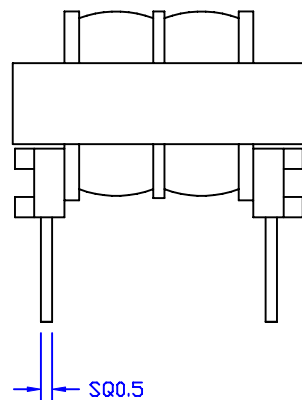
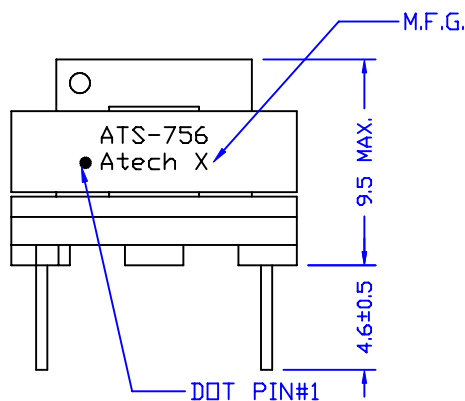
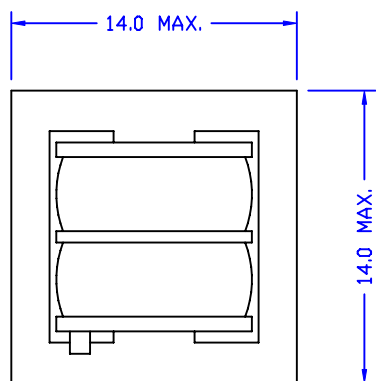


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = $0.86 \Omega \pm 10\%$
PIN 4-6 = $0.86 \Omega \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-3 = $584\mu\text{H} \pm 5\%$
PIN 4-6 = $584\mu\text{H} \pm 5\%$
PIN 1-6 (3-4 SHORT, W/H 80 mA) = 2.1 mH MIN.
- TURN RATIO (@400KHz, 0.1Vrms) :
PIN 1-3 : 4-6 = $1 \pm 2\%$
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE INDUCTOR
								DWG. NO. ATS-756
A	SPEC.	08/29 /2005	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY
	RELEASE	05/25 /2005	BART	MICHAEL	SUEDY			SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						05/25/05	CTAH13011A	<i>Pair</i>