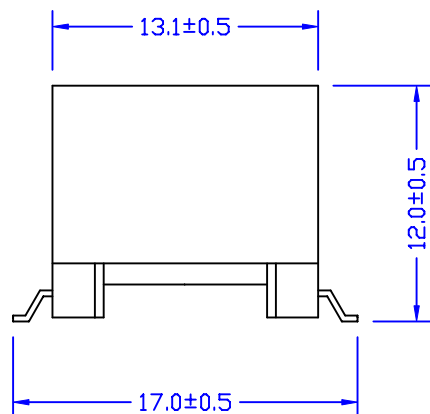
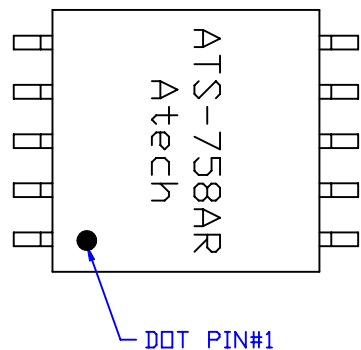


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 600 mΩ MAX.
PIN 2-5 = 600 mΩ MAX.
PIN 10-7 = 400 mΩ MAX.
PIN 9-6 = 500 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410 μH ±5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms)
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 10 μH MAX.
- TURNS RATIO (@10KHz, 1Vrms) :
PIN 1-5:10-6 (2-4,7-9 SHORT)= 1.6:1 ±2%
- HI-POT (@1500VAC, 5mA, 60 SEC) :
PRI-SEC
- RoHS COMPLIANCE.

						Atech®		TITLE ADSL MODEM FOR TERND CHIP	
						Atech Technology Co. Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATS-758AR	
A	MARK ADD R	08/30/2008	PAIR	VINCENT	EUGENE	UNITS:		SAFETY	
	RELEASE	09/12/2005	BART	AL	SUEDY	M/M		SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						09/12/05		CTA413037A	
								DRAW	
								Pair	